


WJ950-9.5

PCB SCREW TERMINAL BLOCK

Download date : 2025-12-06

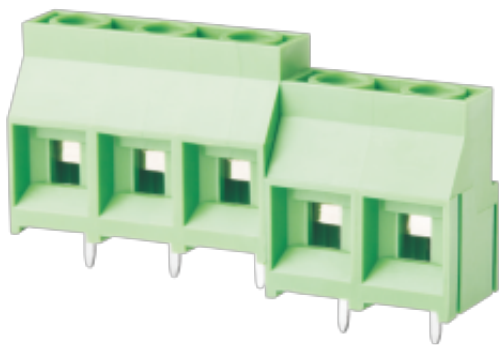

PCB terminal block  
Rated current: 30 A  
Rated voltage: 300 V  
Wire range: 26-10 AWG  
Pitch: 9.5 mm  
Mounting: Wave soldering



For reference only!version1.0

UL/CUL

| Use Group                    | B     | C   | D   |
|------------------------------|-------|-----|-----|
| Rate Voltage [V]             | 300   | 300 | 300 |
| Rated Current [A]            | 30    | 30  | 30  |
| Wire Range [AWG]             | 26~10 |     |     |
| Dielectric Voltage-Withstand | 1.6KV |     |     |

IEC

| Overvoltage Category                          | III     | III  | II   |
|-----------------------------------------------|---------|------|------|
| Contamination Class                           | 3       | 2    | 2    |
| Rated Voltage [V]                             | 630     | 1000 | 1000 |
| Rated Current [A]                             | 32      | 32   | 32   |
| Impulse withstand voltage [KV]                | 8       | 8    | 8    |
| Conductor cross section[solid/flexible] [mm²] | 0.5~4.0 |      |      |

Material

|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame relardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

Other Data

|                            |          |
|----------------------------|----------|
| Pitch/Poles [mm]/[P]       | 9.5/2~24 |
| Stripping Length [mm]      | 6~7      |
| Screw/Torque(Max)[N.m]     | M3/0.5   |
| Operating temperature [°C] | -40~+105 |
| Soldering temperature      | 260°C/5S |
| Pin dimensions [mm]        | 0.8*1.0  |
| PCB Hole Diameter [mm]     | Ø1.6     |

Dimensions

PCB opening diagram

