

For reference only!version1.0

CUL Technical Data (UL1059)

Use Group	B	C	D
Rated Voltage [V]		/	
Rated Current [A]		/	
Wire Range		26-12	

IEC Technical Data (IEC 60947-7-2)

Overvoltage Category	III
Contamination Class	3
Rated Voltage	/
Rated Current	/
Impulse withstand voltage	6KV


Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Data

Length/Height/Thickness [mm]	102.2/56.5/5.2
Stripping Length [mm]	8-10

Dimensions

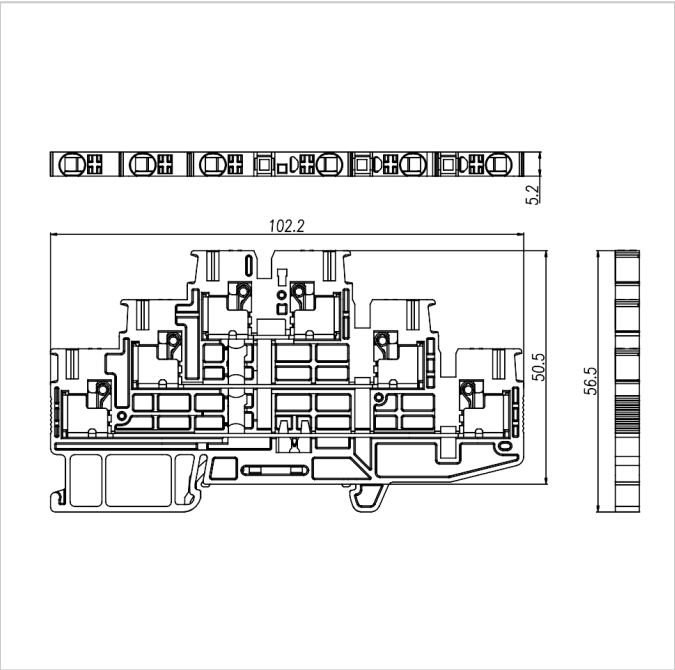


Accessories




[FUVA2.5-XX](#)




[DUV2.5-302](#)



[PUV2.5-96](#)



[EB-35](#)



[EW-35](#)



-

[DGS1-35x7.5W4.2x12](#)



-

[DGS1-35x7.5W5.2x15](#)




-

[DGS1-35x7.5W](#)




-

[DGL2-35x7.5A](#)



-

[DGL2-35x7.5B](#)



-

[DGL2-35x7.5C](#)



-

[DGL2-35x7.5D](#)