



For reference only!version1.0

### CUL Technical Data (UL1059 )

| Use Group         | B     | C   | D   |
|-------------------|-------|-----|-----|
| Rated Voltage [V] | 300   | 300 | 600 |
| Rated Current [A] | 20    | 20  | 5   |
| Wire Range        | 26-12 |     |     |

### IEC Technical Data (IEC 60947-7-1)

|                           |      |
|---------------------------|------|
| Overvoltage Category      | III  |
| Contamination Class       | 3    |
| Rated Voltage [V]         | 500V |
| Rated Current [A]         | 22A  |
| Impulse withstand voltage | 6KV  |

### Conductor cross section

|                       |                        |
|-----------------------|------------------------|
| Soild                 | 0.2-4.0mm <sup>2</sup> |
| Flexible              | 0.2-2.5mm <sup>2</sup> |
| Flexible with ferrule | 0.2-2.5mm <sup>2</sup> |

### Material

GUS2.5-202-PV

GUS Spring-cage terminal block

Download date : 2025-12-06




|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame retardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

Other Data

|                              |               |
|------------------------------|---------------|
| Length/Height/Thickness [mm] | 67.7/46.0/5.2 |
| Stripping Length [mm]        | 8-10          |


Dimensions

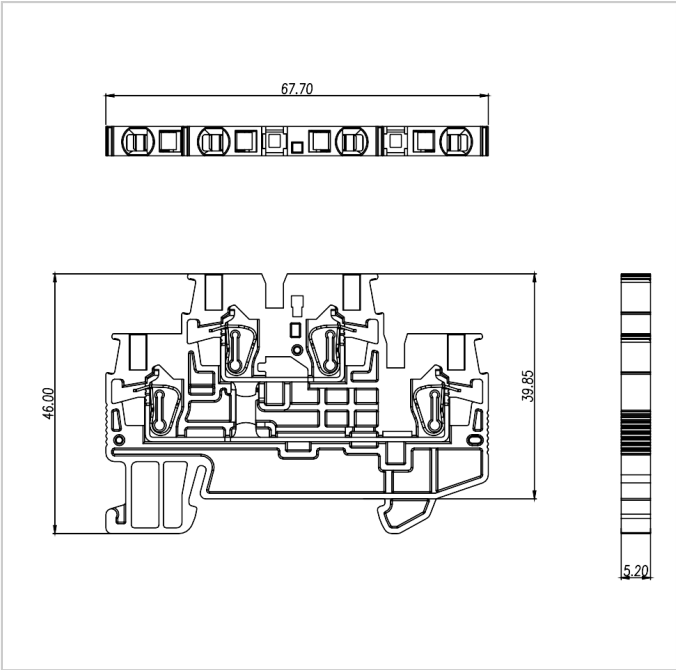


Accessories



[DUS2.5-202](#)



[PUV2.5-96](#)



[FUYA2.5-XX](#)



[EB-35](#)



[EW-35](#)



[DGL2-35x7.5A](#)



[DGL2-35x7.5B](#)



[DGL2-35x7.5C](#)



[DGL2-35x7.5D](#)



[DGS1-35x7.5W4.2x12](#)



[DGS1-35x7.5W5.2x15](#)



[DGS1-35x7.5W](#)