




Electrical Diagram :

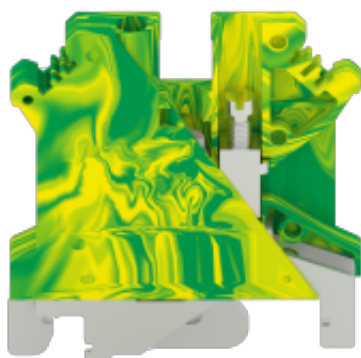

For reference only!version1.0

CUL Technical Data (UL1059)

Wire Range	24-10
------------	-------

IEC Technical Data (IEC 60947-7-2)

Overvoltage Category	III
Contamination Class	3

Conductor cross section

Soild	0.2-6.0mm ²
Flexible	0.2-4.0mm ²
Flexible with ferrule	0.25-2.5mm ²

Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Ni plated

Other Data


GUSLKG5-102-PE

GUK Universal combination terminal block


Download date : 2025-12-06

Length/Height/Thickness [mm]	42.50/46.02/6.20
Connection Points	2
Stripping Length [mm]	8
Type of rail	DIN 35 / DIN 32
Screw/Torque(Max)[N.m]	M3/0.6-0.8
Operating temperature [°C]	-40°C~+105°C


Dimensions

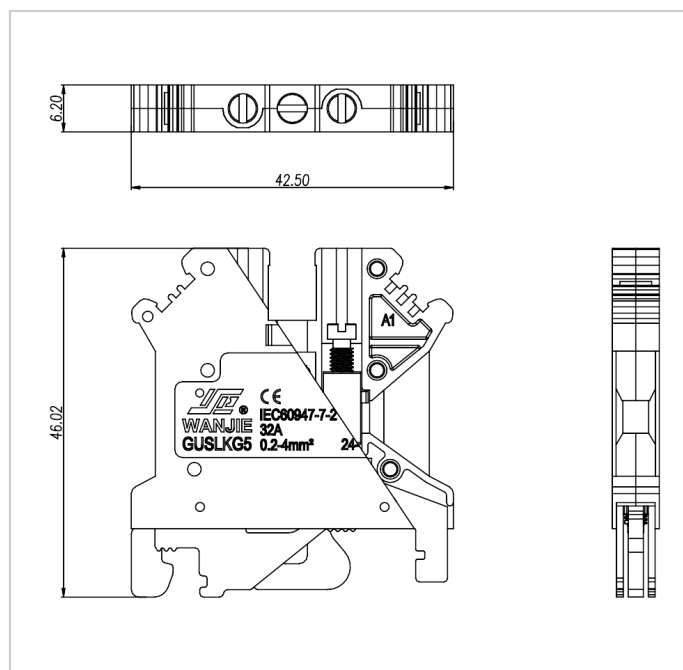

Accessories




[EB-35](#)




[EW-35](#)



[DGL2-35x7.5A](#)



[DGL2-35x7.5B](#)



[DGL2-35x7.5C](#)




[DGL2-35x7.5D](#)



[MUV4-10](#)



[DGS1-35x7.5W4.2x12](#)



[DGS1-35x7.5W5.2x15](#)

[DGS1-35x7.5W](#)

[EC-35](#)