


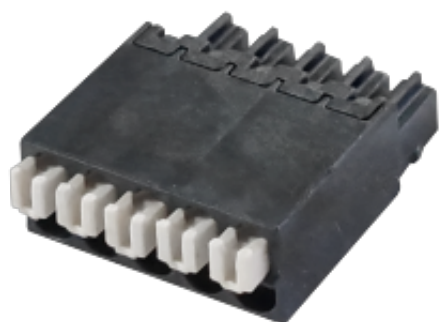

For reference only!version1.0

## UL/CUL

| Use Group                    | B     | C | D |
|------------------------------|-------|---|---|
| Rate Voltage [V]             | 150   | - | - |
| Rated Current [A]            | 5     | - | - |
| Wire Range [AWG]             | 26-18 |   |   |
| Dielectric Voltage-Withstand | 1.3KV |   |   |

## IEC

|                                               |          |     |     |
|-----------------------------------------------|----------|-----|-----|
| Overvoltage Category                          | III      | III | II  |
| Contamination Class                           | 3        | 2   | 2   |
| Rated Voltage [V]                             | 32       | 160 | 320 |
| Rated Current [A]                             | 6        | 6   | 6   |
| Impulse withstand voltage [KV]                | 2.5      | 2.5 | 2.5 |
| Conductor cross section[solid/flexible] [mm²] | 0.14-0.5 |     |     |

## Material


|                        |         |
|------------------------|---------|
| Insulation Material    | PA66    |
| Flame relardant rating | UL94V-0 |

|                              |              |
|------------------------------|--------------|
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |


Other Data

|                            |              |
|----------------------------|--------------|
| Pitch/Poles [mm]/[P]       | 2.54/2-24    |
| Stripping Length [mm]      | 7-8          |
| Screw/Torque(Max)[N.m]     | -            |
| Operating temperature [°C] | -40°C~+105°C |
| Soldering temperature      | /            |
| Pin dimensions [mm]        | /            |
| PCB Hole Diameter [mm]     | /            |


Dimensions

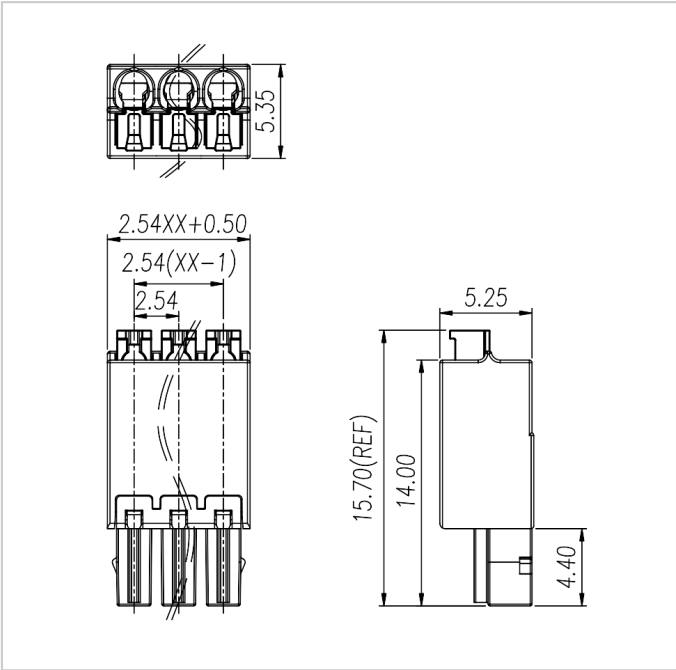


Accessories




[WJ15VD-THR-2.54](#)



[WJ15RD-THR-2.54](#)



[WJ15VDM-THR-2.54](#)



[WJ15RDM-THR-2.54](#)