


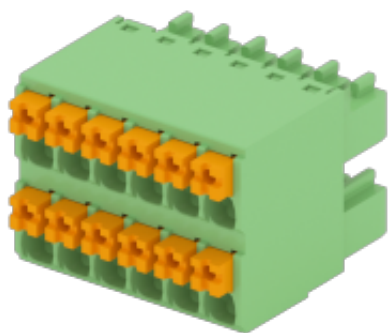

For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	10	-	10
Wire Range [AWG]	28-16		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	160	160	320
Rated Current [A]	10	10	10
Impulse withstand voltage [KV]	2.5	2.5	2.5
Conductor cross section[solid/flexible] [mm²]	0.2-1.5		


Material

Insulation Material	PA66
Flame relardant rating	UL94V-0

WJ15KV-B-3.5

PLUG-IN TERMINAL BLOCK

Download date : 2025-12-06



[WJ15EDGVHB-THT-3.5/3.81](#)



[WJ15EDGRHB-THT-3.5/3.81](#)