


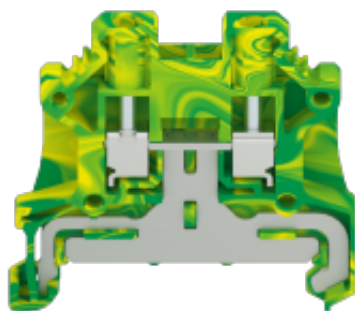

For reference only!version1.0

## CUL Technical Data (UL1059 )

|            |          |
|------------|----------|
| Wire Range | 26-12AWG |
|------------|----------|

## Conductor cross section

|                       |                         |
|-----------------------|-------------------------|
| Soild                 | 0.2-4.0mm <sup>2</sup>  |
| Flexible              | 0.2-2.5mm <sup>2</sup>  |
| Flexible with ferrule | 0.25-2.5mm <sup>2</sup> |

## IEC Technical Data (IEC 60947-7-2)

|                           |     |
|---------------------------|-----|
| Overvoltage Category      | III |
| Contamination Class       | 3   |
| Impulse withstand voltage | 8KV |

## Material

|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame relardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

## Other Data

|                              |               |
|------------------------------|---------------|
| Length/Height/Thickness [mm] | 44.0/40.0/5.2 |
| Stripping Length [mm]        | 8-9           |
| Screw/Torque(Max)[N.m]       | M2.5/0.4-0.5  |

## Dimensions

