


WJ105VA-5.0

PCB SCREW TERMINAL BLOCK

Download date : 2025-12-07

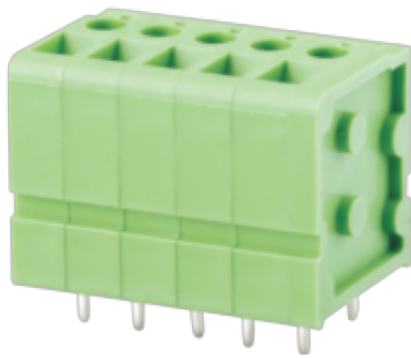

PCB terminal block
Rated current: 20 A
Rated voltage: 300 V
Wire range: 26-12 AWG
Pitch: 5.0 mm
Mounting: Wave soldering



For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	20	-	10
Wire Range [AWG]	26~12		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	250	400	630
Rated Current [A]	24	24	24
Impulse withstand voltage [KV]	4	4	4
Conductor cross section[solid/flexible] [mm²]	0.5~2.5		

Material

Other Data

Dimensions

PCB opening diagram

