



PCB connector

Rated current: 15 A

Rated voltage: 300 V

Pitch: 5.0 mm/5.08 mm

Mounting: Reflow soldering



For reference only!version1.0

## UL/CUL

| Use Group                    | B     | C | D   |
|------------------------------|-------|---|-----|
| Rate Voltage [V]             | 300   | - | 300 |
| Rated Current [A]            | 15    | - | 10  |
| Wire Range [AWG]             | /     |   |     |
| Dielectric Voltage-Withstand | 1.6KV |   |     |

## IEC

|                                               |     |     |     |
|-----------------------------------------------|-----|-----|-----|
| Overvoltage Category                          | III | III | II  |
| Contamination Class                           | 3   | 2   | 2   |
| Rated Voltage [V]                             | 250 | 320 | 400 |
| Rated Current [A]                             | 18  | 18  | 18  |
| Impulse withstand voltage [KV]                | 4   | 4   | 4   |
| Conductor cross section[solid/flexible] [mm²] | /   |     |     |

## Material

|                     |     |
|---------------------|-----|
| Insulation Material | LCP |
|---------------------|-----|


|                              |              |
|------------------------------|--------------|
| Flame relardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

Other Data

|                            |                 |
|----------------------------|-----------------|
| Pitch/Poles [mm]/[P]       | 5.0 , 5.08/2-24 |
| Stripping Length [mm]      | /               |
| Screw/Torque(Max)[N.m]     | /               |
| Operating temperature [°C] | -40~+130        |
| Soldering temperature      | 285°C/10S       |
| Pin dimensions [mm]        | 1.0*1.0         |
| PCB Hole Diameter [mm]     | Ø1.7            |

Dimensions

PCB opening diagram

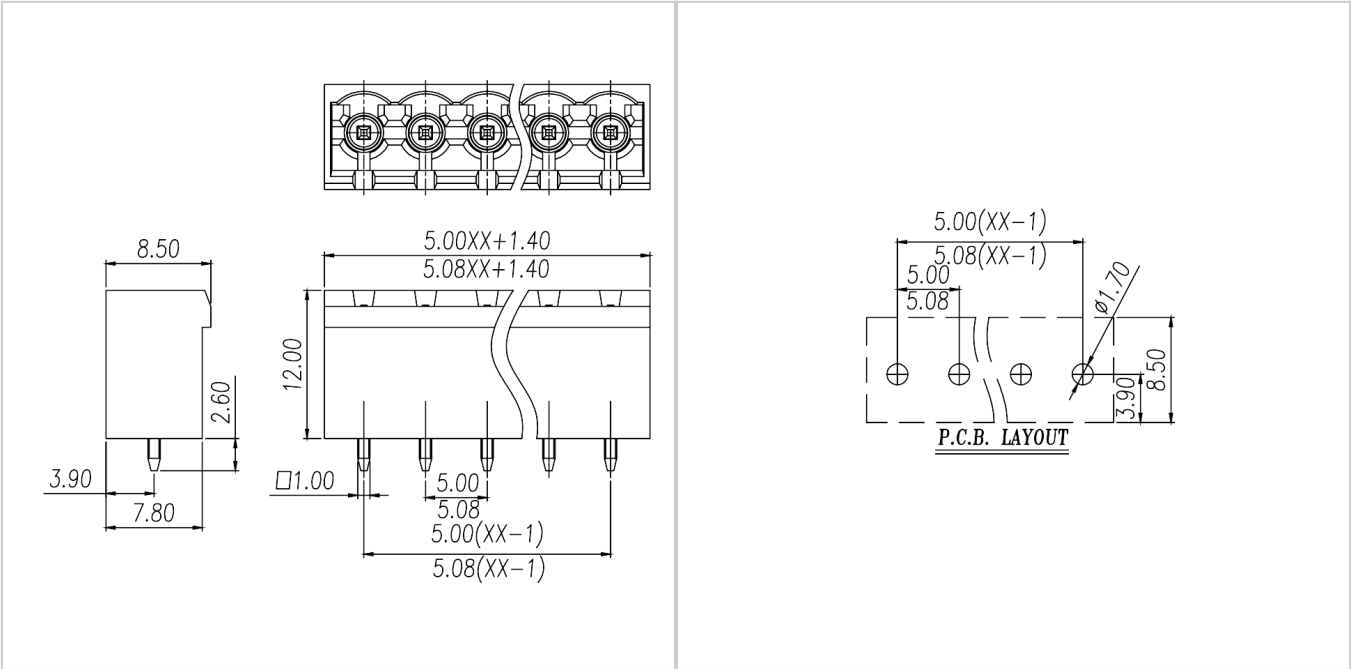

Accessories



[WJ2EDGK-5.0/5.08](#)



[WJ2EDGKA-5.0/5.08](#)



[WJ2EDGKB-5.0/5.08](#)




[WJ2EDGKC-5.0/5.08](#)




[WJ2EDGKD-5.0/5.08](#)



[WJ2EDGKDA-5.0/5.08](#)



[WJ2EDGKDB-5.0/5.08](#)



[WJ2EDGKDH-5.08](#)



[WJ2EDGKF-5.0](#)



[WJ2EDGKH-5.08](#)



[WJ2EDGKAH-5.08](#)




[WJ2EDGKZ-5.0/5.08](#)



[WJ2EDGKL-5.0/5.08](#)



[WJ2EDGA-5.0/5.08](#)



[WJ2EDGB-5.0/5.08](#)