


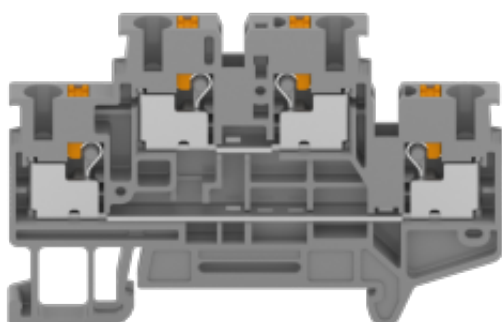

For reference only!version1.0

CUL Technical Data (UL1059)

Use Group	B	C	D
Rated Voltage [V]	300	300	600
Rated Current [A]	20	20	5
Wire Range	26-12AWG		

IEC Technical Data (IEC 60947-7-1)

Overvoltage Category	III
Contamination Class	3
Rated Voltage [V]	500V
Rated Current [A]	22A
Impulse withstand voltage	6KV

Conductor cross section

Soild	0.2-4mm ²
Flexible	0.2-2.5mm ²
Flexible with ferrule	0.2-2.5mm ²

Material

GUV2.5-202

GUV Push-in terminal block

Download date : 2025-12-06




Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

Length/Height/Thickness [mm]	68.2/45.9/5.2
Stripping Length [mm]	8-10
Approval	/


Dimensions

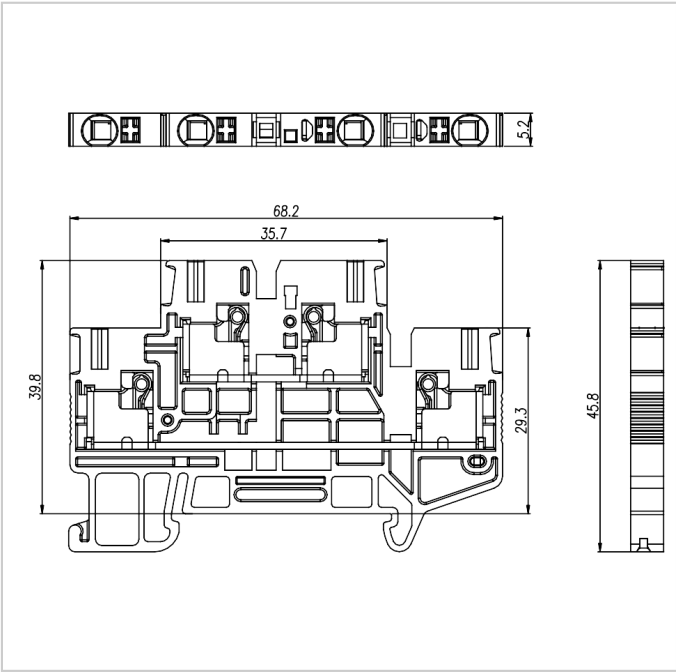


Accessories




[DUV2.5-202](#)




[PUV2.5-96](#)



[FUV2.5-XX](#)



[EB-35](#)



[EW-35](#)



-
[DGS1-35x7.5W4.2x12](#)



-
[DGS1-35x7.5W5.2x15](#)



-
[DGS1-35x7.5W](#)



-
[DGL2-35x7.5A](#)



-
[DGL2-35x7.5B](#)



-
[DGL2-35x7.5C](#)



-
[DGL2-35x7.5D](#)