

For reference only!version1.0

### CUL Technical Data (UL1059 )

|            |          |
|------------|----------|
| Wire Range | 26-14AWG |
|------------|----------|

### IEC Technical Data (IEC 60947-7-2)

|                           |     |
|---------------------------|-----|
| Overvoltage Category      | III |
| Contamination Class       | 3   |
| Impulse withstand voltage | 6KV |

### Conductor cross section

|                       |                        |
|-----------------------|------------------------|
| Soild                 | 0.2-1.5mm <sup>2</sup> |
| Flexible              | 0.2-1.5mm <sup>2</sup> |
| Flexible with ferrule | 0.2-1mm <sup>2</sup>   |


### Material

|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame relardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |


### Other Data

|                              |               |
|------------------------------|---------------|
| Length/Height/Thickness [mm] | 65.6/41.1/3.5 |
| Stripping Length [mm]        | 8-10          |
| Approval                     | /             |

## Dimensions

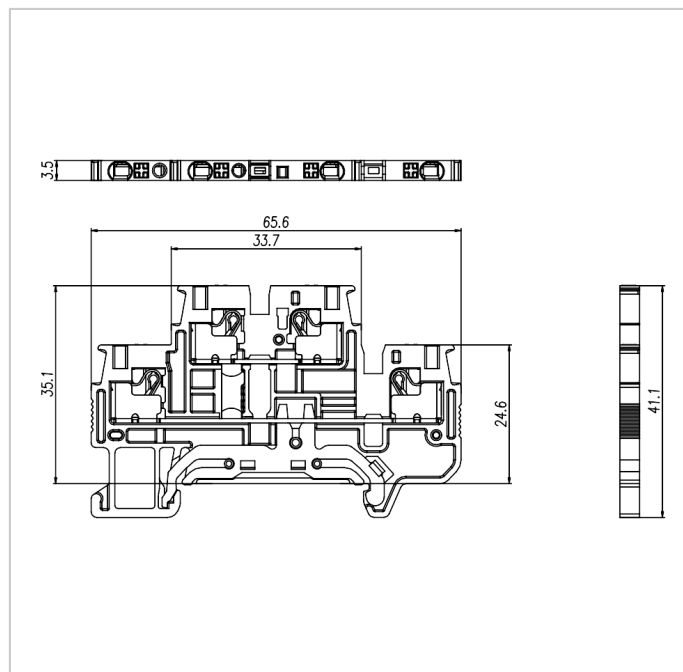


## Accessories




[FUVA1.5-XX](#)




[DUV1.5-202](#)



[PUV1.5-144](#)



[EB-35](#)



[EW-35](#)



-

[DGS1-35x7.5W4.2x12](#)



-

[DGS1-35x7.5W5.2x15](#)




-

[DGS1-35x7.5W](#)




-

[DGL2-35x7.5A](#)



-

[DGL2-35x7.5B](#)



-

[DGL2-35x7.5C](#)



-

[DGL2-35x7.5D](#)