



电路图：



目录仅供参考，实际规格依产品工程图为准 版本1.0

### 技术参数-UL ( 1059 )

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	600
额定电流 Rated Current [A]	55	55	5
耐电压 Withstanding Voltage	2200V/1Min		
接线范围 Wire Range	24-6AWG		

### 技术参数-IEC(60947-7-1)

过电压类别 Overvoltage Category	III
污染等级 Contamination Class	3
额定电压 Rated Voltage	1000V
额定电流 Rated Current	57A
额定冲击电压 Impulse withstand voltage	8KV

### 导线截面积 Conductor cross section

单芯 Solid	0.2-16.0mm <sup>2</sup>
柔性导线 Flexible	0.2-10.0mm <sup>2</sup>
柔性导线带冷压头 Flexible with ferrule	0.25-10.0mm <sup>2</sup>


## 材料 Material

绝缘材料 Insulation Material	PA66
阻燃等级 Flame retardant rating	UL94V-0
导体材料 Conductor Material	Copper alloy
导体表面镀层 Plating of conductor surface	Sn plated

## 一般参数 Other Data

长/高/厚 Length/Height/Thickness [mm]	95.5/49.5/10.2
连接点数 Connection Points	3
剥线长度 Stripping Length [mm]	18
导轨类型 Type of rail	DIN 35
螺丝/扭矩 Screw/Torque(Max)[N.m]	/
工作温度 Operating temperature [°C]	-40~+105

## 尺寸图

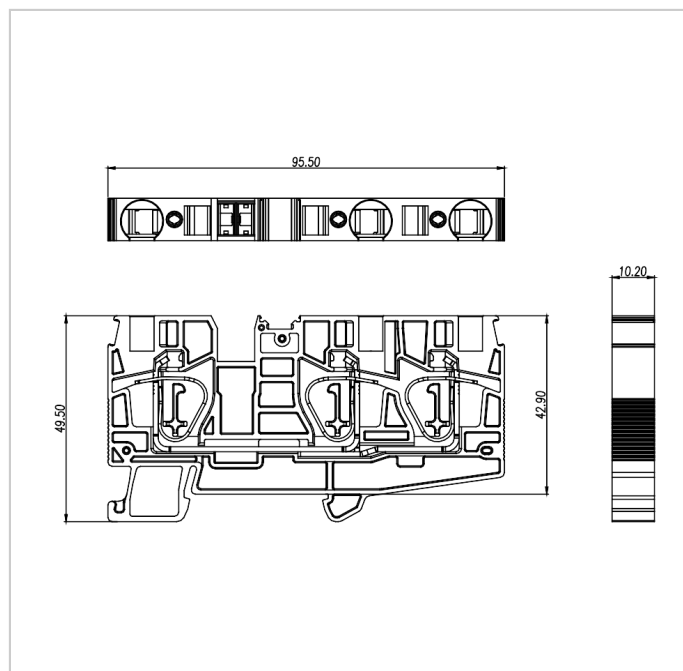



## 配件



FUVA10-XX

MUV10-10



PUV10-48



EB-35

EW-35


DGL2-35x7.5A



DGL2-35x7.5B

DGL2-35x7.5C

DGL2-35x7.5D



DUS10-103

DGS1-35x7.5W4.2x12

DGS1-35x7.5W5.2x15



DGS1-35x7.5W