

插拔式连接器  
额定电流: 8 A  
额定电压: 300 V  
使用线径: 24-16 AWG  
间距: 3.5 mm/3.81 mm  
接线方式: 直插式弹簧连接



目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL/CUL

| 等级 Use Group                     | B     | C | D   |
|----------------------------------|-------|---|-----|
| 额定电压 Rate Voltage [V]            | 300   | - | 300 |
| 额定电流 Rated Current [A]           | 8     | - | 8   |
| 接线范围 Wire Range [AWG]            | 24~16 |   |     |
| 耐电压 Dielectric Voltage-Withstand | 1.6KV |   |     |

技术参数-IEC

|                                          |         |     |     |
|------------------------------------------|---------|-----|-----|
| 过电压类别 Overvoltage Category               | III     | III | II  |
| 污染等级 Contamination Class                 | 3       | 2   | 2   |
| 额定电压 Rated Voltage [V]                   | 160     | 160 | 320 |
| 额定电流 Rated Current [A]                   | 8       | 8   | 8   |
| 额定冲击电压 Impulse withstand voltage [KV]    | 2.5     | 2.5 | 2.5 |
| 导线截面积[硬/柔] Conductor cross section [mm²] | 0.2~1.5 |     |     |

材料 Material

WJ15EDGKN-3.5/3.81

插拔式接线端子

下载日期:2025-12-06




|                                     |              |
|-------------------------------------|--------------|
| 绝缘材料 Insulation Material            | PA66         |
| 阻燃等级 Flame relardant rating         | UL94V-0      |
| 导体材料 Conductor Material             | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Sn plated    |


一般参数 Other Data

|                                 |                 |
|---------------------------------|-----------------|
| 间距/极数 Pitch/Poles [mm]/[P]      | 3.5 , 3.81/2~24 |
| 剥线长度 Stripping Length [mm]      | 9~10            |
| 螺丝/扭矩 Screw/Torque(Max)[N.m]    | /               |
| 工作温度 Operating temperature [°C] | -40~+105        |
| 焊锡温度 Soldering temperature      | /               |
| 引针尺寸 Pin dimensions [mm]        | /               |
| PCB板孔径 PCB Hole Diameter [mm]   | /               |

尺寸图

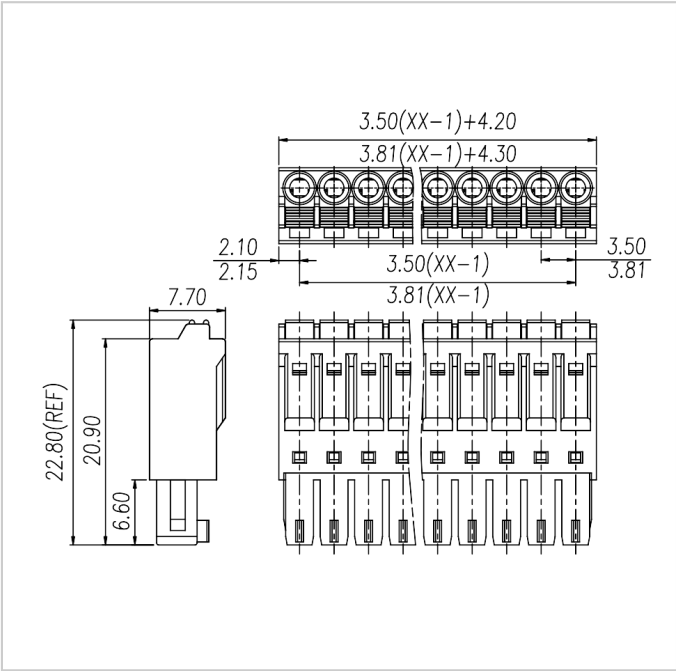

配件



WJ15EDGVHB-THT-3.5/3.81




WJ15EDGRHB-THT-3.5/3.81




WJ15EDGVC-THR-3.5/3.81



WJ15EDGRC-THR-3.5/3.81




WJ15EDGKR-3.81




WJ15EDGKNR-3.5



WJ15EDGLC-3.5/3.81



WJ15EDGVC-3.5/3.81



WJ15EDGRC-3.5/3.81



WJ15EDGVH3C-3.5



WJ15EDGRH3C-3.5



WJ15EDGRH3C-THT-3.5



WJ15EDGVH3C-THT-3.5