


|                                                                                   |                                                                                                                      |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
|  | <p>弹簧式PCB连接器</p> <p>额定电流: 4 A</p> <p>额定电压: 150 V</p> <p>使用线径: 28-20 AWG</p> <p>间距: 2.5 mm/2.54 mm</p> <p>安装: 波峰焊</p> |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|

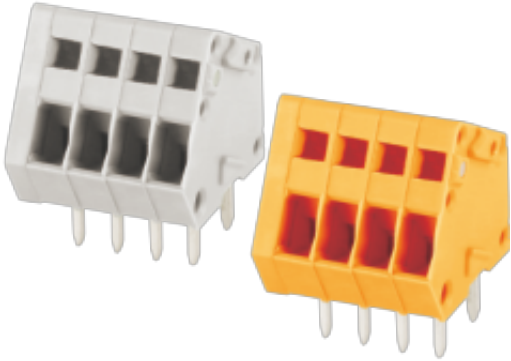

目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL/CUL

|                                  |       |   |   |
|----------------------------------|-------|---|---|
| 等级 Use Group                     | B     | C | D |
| 额定电压 Rate Voltage [V]            | 150   | - | - |
| 额定电流 Rated Current [A]           | 4     | - | - |
| 接线范围 Wire Range [AWG]            | 28-20 |   |   |
| 耐电压 Dielectric Voltage-Withstand | 1.3KV |   |   |

技术参数-IEC

|                                          |         |     |     |
|------------------------------------------|---------|-----|-----|
| 过电压类别 Overvoltage Category               | III     | III | II  |
| 污染等级 Contamination Class                 | 3       | 2   | 2   |
| 额定电压 Rated Voltage [V]                   | 63      | 160 | 320 |
| 额定电流 Rated Current [A]                   | 6       | 6   | 6   |
| 额定冲击电压 Impulse withstand voltage [KV]    | 2.5     | 2.5 | 2.5 |
| 导线截面积[硬/柔] Conductor cross section [mm²] | 0.2-0.5 |     |     |

材料 Material


|  |  |
|--|--|
|  |  |
|--|--|

|                                     |              |
|-------------------------------------|--------------|
| 绝缘材料 Insulation Material            | PA66         |
| 阻燃等级 Flame relardant rating         | UL94V-0      |
| 导体材料 Conductor Material             | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Sn plated    |

一般参数 Other Data

|                                 |                 |
|---------------------------------|-----------------|
| 间距/极数 Pitch/Poles [mm]/[P]      | 2.5 , 2.54/1-30 |
| 剥线长度 Stripping Length [mm]      | 5-6             |
| 螺丝/扭矩 Screw/Torque(Max)[N.m]    | /               |
| 工作温度 Operating temperature [°C] | -40~+105        |
| 焊锡温度 Soldering temperature      | 260°C/5S        |
| 引针尺寸 Pin dimensions [mm]        | 0.75*0.5        |
| PCB板孔径 PCB Hole Diameter [mm]   | Ø1.2            |

尺寸图

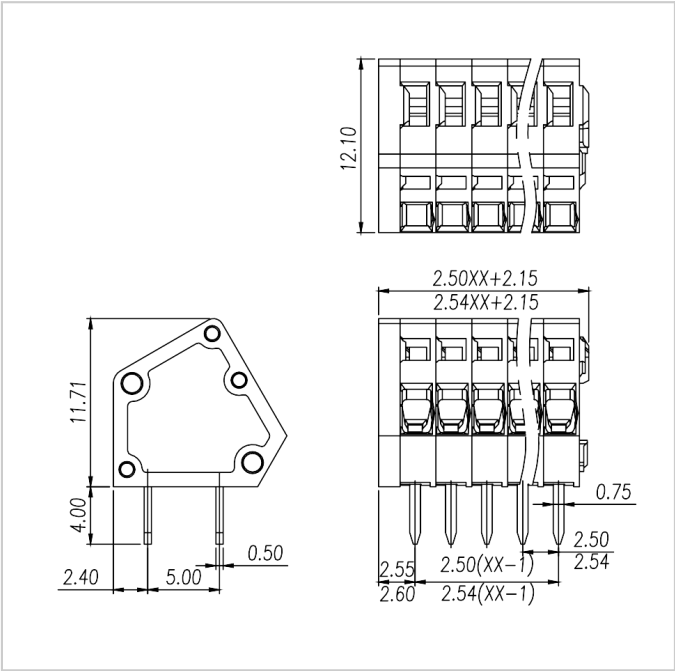

PCB开孔图

