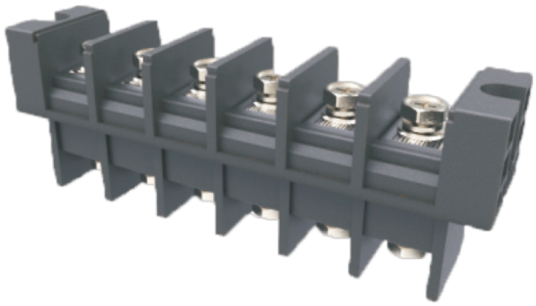


Rated current: 170A

Rated voltage: 600V

Use wire diameter: 10-2/0AWG

spacing:27.0mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## Material

| | |
|---|---|
| Screws | M8.0 Steel Zn plated |
| Pin Header | Copper alloy , Sn plated |
| Housing | PBT , UL94V-0 |

## Electrical


| | |
|---|---|
| Standard | UL |
| Rated voltage | 600V |
| Rated current | 170A |
| Wire range | 10-2/0AWG |
| Contact Resistance | 20mΩ |
| Insulation resistance | 1000MΩ/DC500V |

| | |
|---|---|
| Withstanding voltage | AC2500V/1Min |

## Other Date

| | |
|---|---|
| Pitch/Poles [mm]/[P] | 27.0/1-15 |
| Operating temperature [℃] | -40～+130 |
| Torque | 61.2Kgf.cm/6.0N.m/53.1Lb.in |

## Dimensions

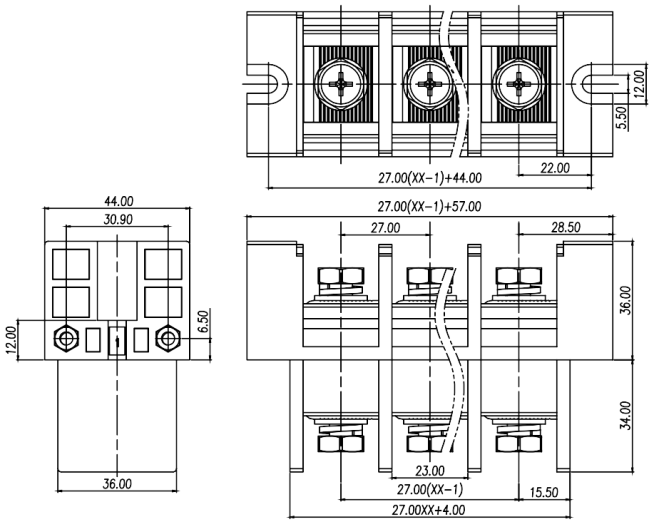


## PCB hole diagram

