


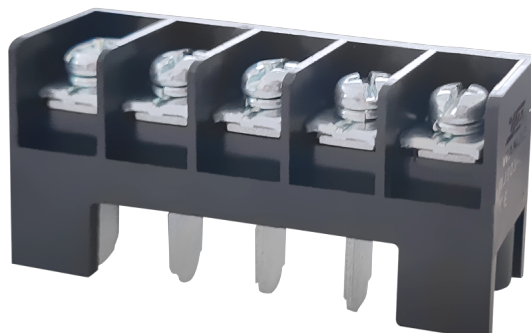

Rated current: 20A

Rated voltage: 300V

Use wire diameter: 26-12AWG

spacing:13.5mm

The catalog is for reference only. The actual
specifications are subject to the product
engineering drawings. version 1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	300	300
Rated Current [A]	20	20	10
Wire Range [AWG]	26-12		
Dielectric Voltage-Withstand	1.6KV		

Material

Insulation Material	PBT
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Date

Pitch/Poles [mm]/[P]	13.5/3-14
Stripping Length [mm]	10-13
Screw/Torque(Max)[N.m]	M5/2.0
Operating temperature [°C]	-30 ~ +120
Soldering method	Wave soldering
Pin dimensions [mm]	1.2*5.8
PCB Hole Diameter [mm]	2.0*6.6

Dimensions

PCB hole diagram

