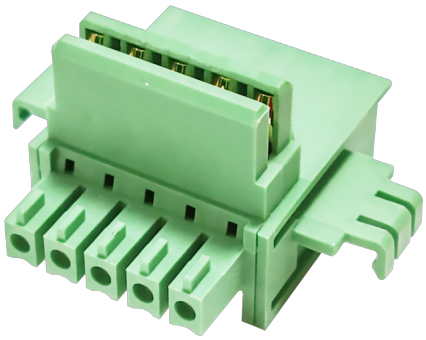


Rated current: 8A

Rated voltage: 150V

spacing:3.81mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	150	-	150
Rated Current [A]	8	-	8
Wire Range [AWG]		-	
Dielectric Voltage-Withstand		1.3KV	

IEC

Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
Contamination Class	3	2	2
Rated Voltage [V]	125	125	320
Rated Current [A]	8	8	8

Impulse withstand voltage [KV]	2.5	2.5	2.5
Conductor cross section [mm²]		-	


Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Au plated

Other Date

Pitch/Poles [mm]/[P]	3.81/5
Stripping Length [mm]	-
Screw/Torque(Max)[N.m]	-
Operating temperature [℃]	-40～+105
Soldering temperature	-
Pin dimensions [mm]	-
PCB Hole Diameter [mm]	-

Dimensions

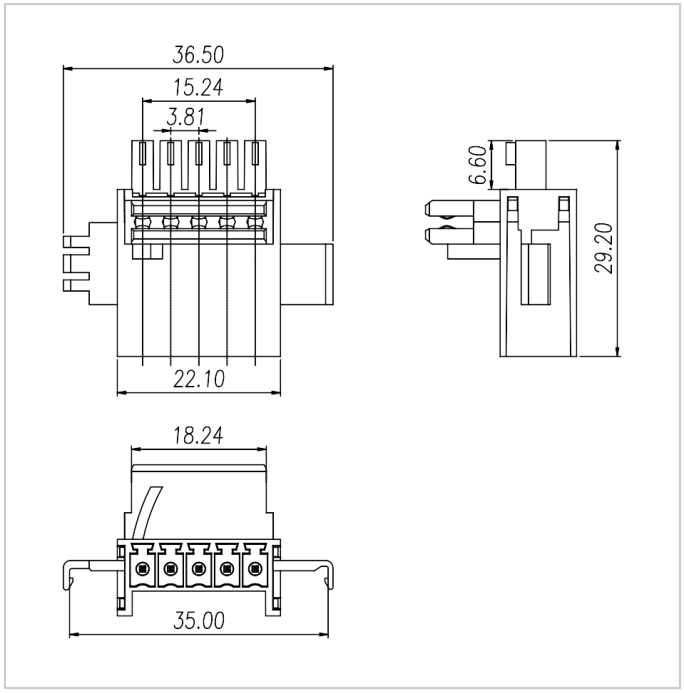
36.50
15.24
3.81
6.60
29.20
22.10
18.24
35.00