

Rated current: 60A

Rated voltage: 600V

Use wire diameter: 20-6AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL ( 1059 )

| Use Group | B | C | D |
|---|---|---|---|
| Rate Voltage [V] | 600 | 600 | 600 |
| Rated Current [A] | 60 | 60 | 5 |
| Wire Range [AWG] | | 20～6 | |

## IEC ( 60947-7-1 )

| | |
|---|---|
| Rated Voltage [V] | 1000 |
| Rated Current [A] | 57 |
| Soild [mm²] | 0.5-16.0 |
| Flexible [mm²] | 0.5-10.0 |
| Flexible with ferrule [mm²] | 0.5-10.0 |

| | |
|---|---|
| Overvoltage Category | III |
| Contamination Class | 3 |
| Impulse withstand voltage [KV] | 8 |


## Material

| | |
|---|---|
| Insulation Material | PA66 |
| Flame relardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |

## Other Date

| | |
|---|---|
| Length/Height/Thickness [mm] | 89.2/49.7/10.2 |
| Stripping Length [mm] | 18 |

## Dimensions

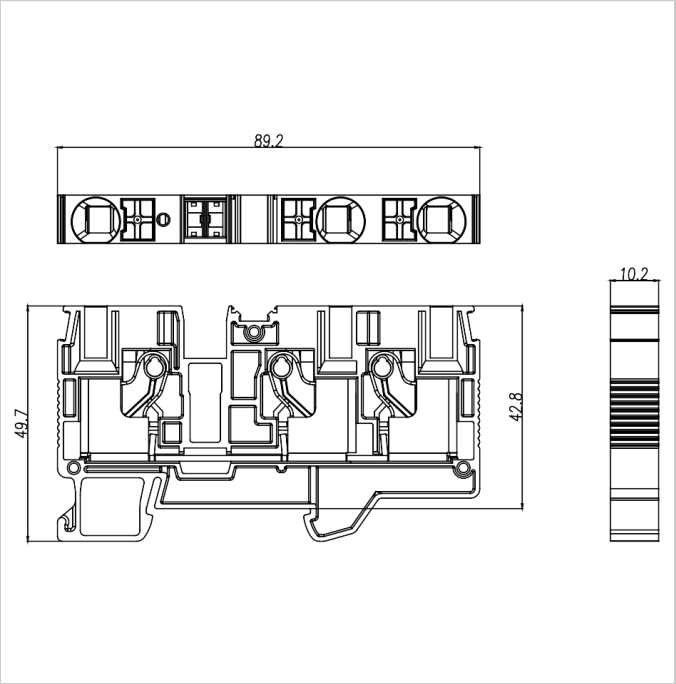



## Accessories




FUVA10-XX




DUV10-103



MUV10-10



PUV10-48




EB-35



EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D