

Rated current: 30A

Rated voltage: 600V

Use wire diameter: 24-10AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL ( 1059 )

| Use Group | B | C | D |
|---|---|---|---|
| Rate Voltage [V] | 600 | 600 | 600 |
| Rated Current [A] | 30 | 30 | 5 |
| Wire Range [AWG] | | 24～10 | |

## IEC ( 60947-7-1 )

| | |
|---|---|
| Rated Voltage [V] | 800 |
| Rated Current [A] | 32 |
| Soild [mm²] | 0.2-6.0 |
| Flexible [mm²] | 0.2-4.0 |
| Flexible with ferrule [mm²] | 0.2-4.0 |

| | |
|---|---|
| Overvoltage Category | III |
| Contamination Class | 3 |
| Impulse withstand voltage [KV] | 8 |


## Material

| | |
|---|---|
| Insulation Material | PA66 |
| Flame relardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |


## Other Date

| | |
|---|---|
| Length/Height/Thickness [mm] | 77.0/35.3/6.2 |
| Stripping Length [mm] | 10-12 |

## Dimensions

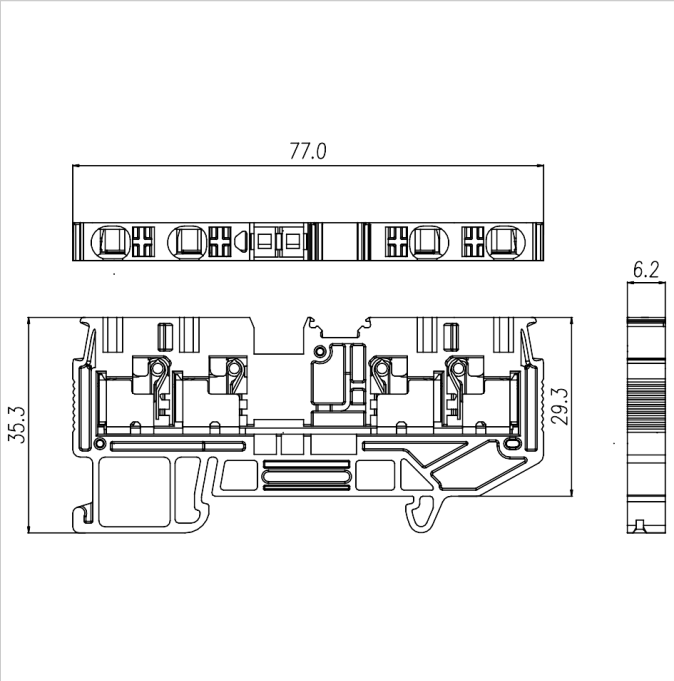


## Accessories




FUVA4-XX




DUV4-104



MUV4-10



PUV4-80




EB-35



EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D