


Use wire diameter: 24-10AWG

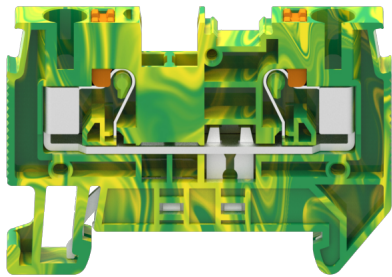

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL ( 1059 )

| Use Group        | B | C       | D |
|------------------|---|---------|---|
| Wire Range [AWG] |   | 24 ~ 10 |   |

IEC ( 60947-7-2 )

|                                |         |
|--------------------------------|---------|
| Soild [mm²]                    | 0.2-6.0 |
| Flexible [mm²]                 | 0.2-4.0 |
| Flexible with ferrule [mm²]    | 0.2-4.0 |
| Overvoltage Category           | III     |
| Contamination Class            | 3       |
| Impulse withstand voltage [KV] | 8       |


Material

|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame retardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

Other Date

|                              |               |
|------------------------------|---------------|
| Length/Height/Thickness [mm] | 55.9/35.2/6.2 |
| Stripping Length [mm]        | 10-12         |


Dimensions

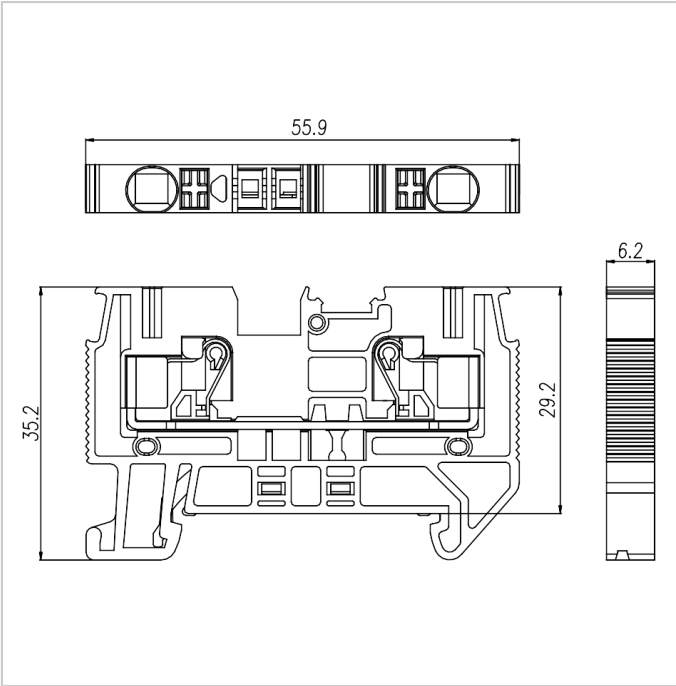


Accessories



DUV4-102



FUVA4-XX




MUV4-10




PUV4-80



EB-35




EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C

DGL2-35x7.5D