


Use wire diameter: 20-8AWG

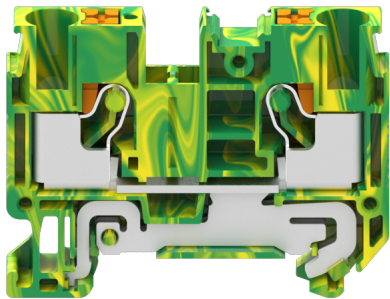

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Use Group	B	C	D
Wire Range [AWG]		20 ~ 8	

IEC (60947-7-2)

Soild [mm²]	0.5-10.0
Flexible [mm²]	0.5-6.0
Flexible with ferrule [mm²]	0.5-6.0
Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	8


Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Data

Length/Height/Thickness [mm]	57.8/42.3/8.2
Stripping Length [mm]	10-12

Dimensions

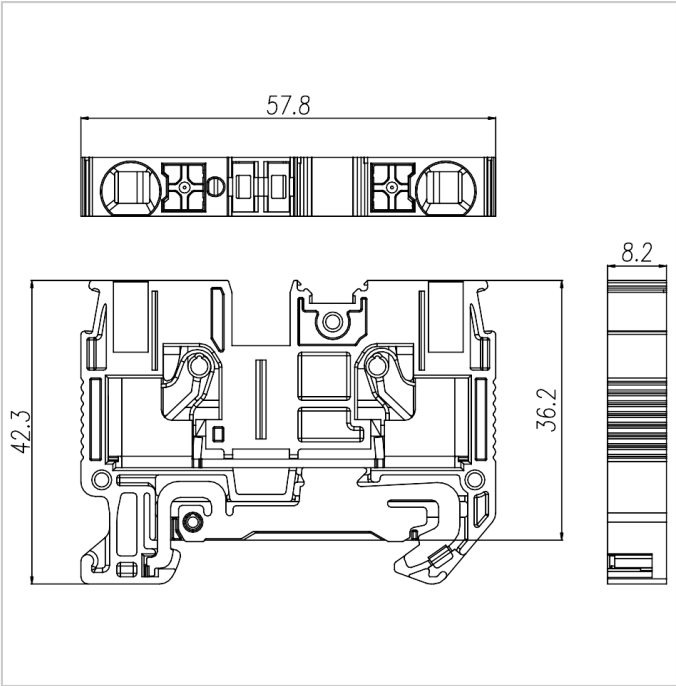


Accessories




DUV6-102



FUVA6-XX




MUV6-10




PUV6-56



EB-35



EW-35



DGL2-35x7.5A



DGL2-35x7.5B

DGL2-35x7.5B

DGL2-35x7.5C

DGL2-35x7.5D