

Use wire diameter: 26-14AWG

spacing:3.5mm

Install: DGL2-35x7.5

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL ( 1059 )

| Use Group | B | C | D |
|---|---|---|---|
| Wire Range [AWG] | 26～14 | | |

## IEC ( 60947-7-2 )

| | |
|---|---|
| Soild [mm²] | 0.2-1.5 |
| Flexible [mm²] | 0.2-1.5 |
| Flexible with ferrule [mm²] | 0.2-1.0 |
| Overvoltage Category | III |
| Contamination Class | 3 |
| Impulse withstand voltage [KV] | 6 |


## Material

| | |
|---|---|
| Insulation Material | PA66 |
| Flame relardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |


## Other Date


| | |
|---|---|
| Length/Height/Thickness [mm] | 54.2/30.6/3.5 |
| Stripping Length [mm] | 8-10 |

## Dimensions

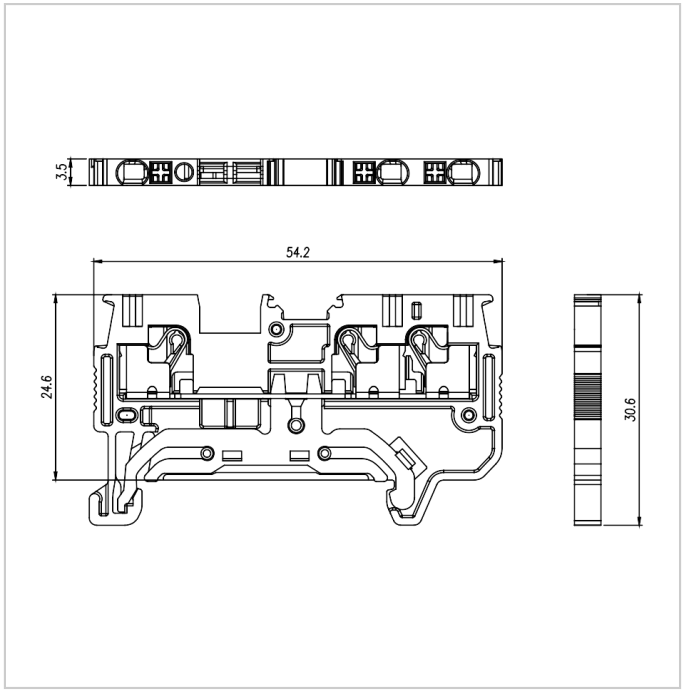



## Accessories






FUVA1.5-XX



DUV1.5-103



MUV1.5-10




PUV1.5-144

EB-35

EW-35







DGL2-35x7.5A

DGL2-35x7.5B

DGL2-35x7.5C



DGL2-35x7.5D