

Use wire diameter: 20-8AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL ( 1059 )

| Use Group | B | C | D |
|---|---|---|---|
| Wire Range [AWG] | 20 ~ 8 | | |

## IEC ( 60947-7-1 )

| | |
|---|---|
| Soild [mm²] | 0.5-10.0 |
| Flexible [mm²] | 0.5-6.0 |
| Flexible with ferrule [mm²] | 0.5-6.0 |
| Overvoltage Category | III |
| Contamination Class | 3 |
| Impulse withstand voltage [KV] | 8 |


## Material

| | |
|---|---|
| Insulation Material | PA66 |
| Flame relardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |

## Other Date


| | |
|---|---|
| Length/Height/Thickness [mm] | 74.2/42.3/8.2 |
| Stripping Length [mm] | 10-12 |

## Dimensions

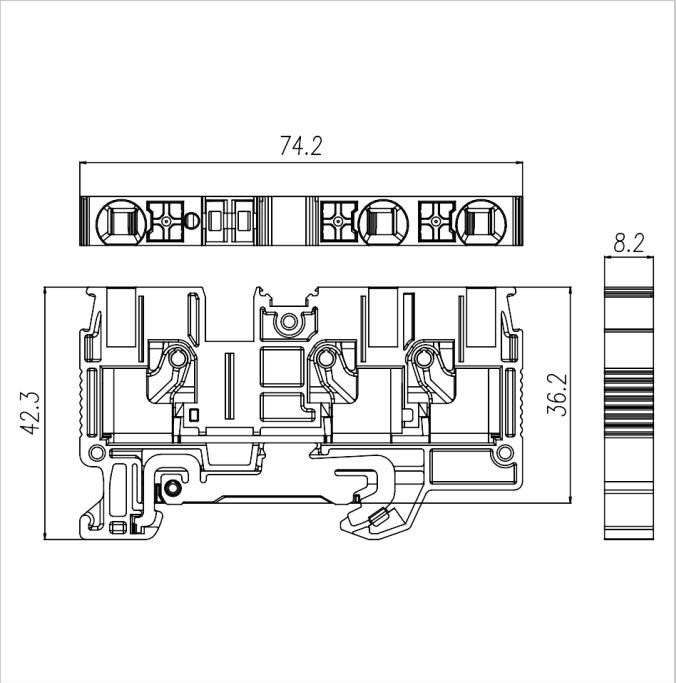



## Accessories






FUVA6-XX



DUV6-103




MUV6-10



PUV6-56



EB-35



EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D