

Use wire diameter: 24-8AWG



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

| | |
|------------------|------|
| Wire Range [AWG] | 20~8 |
|------------------|------|

IEC (60947-7-2)

| | |
|--|----------|
| Soild [mm ²] | 0.2-10.0 |
| Flexible [mm ²] | 0.2-6.0 |
| Flexible with ferrule [mm ²] | 0.25-6.0 |
| Overvoltage Category | III |
| Contamination Class | 3 |
| Impulse withstand voltage [KV] | 8 |

Material


| | |
|---------------------|------|
| Insulation Material | PA66 |
|---------------------|------|

| | |
|------------------------------|--------------|
| Flame retardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |

Other Data

| | |
|------------------------------|---------------|
| Length/Height/Thickness [mm] | 69.5/42.6/8.2 |
| Stripping Length [mm] | 12 |

Dimensions

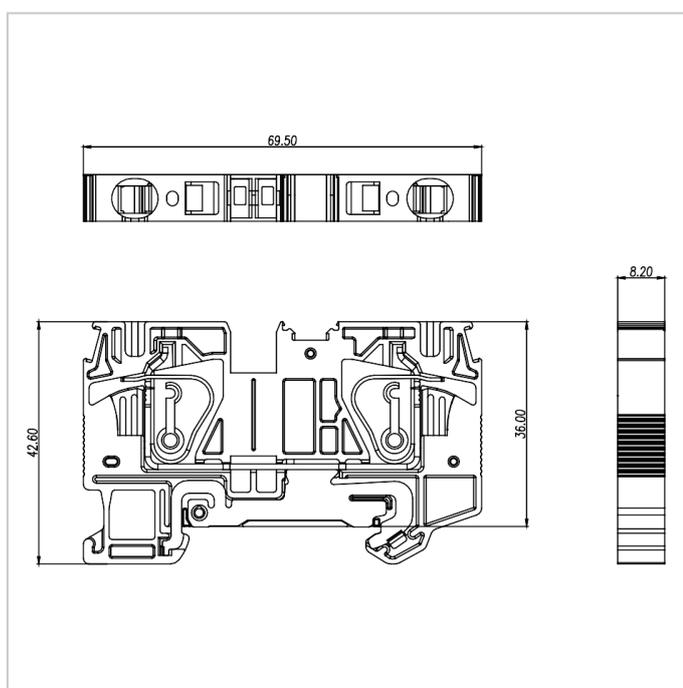

Accessories



FUVA6-XX



DUS6-102



MUV6-10



PUV6-56



EB-35



EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D