

Use wire diameter: 26-14AWG



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL ( 1059 )

|                  |         |
|------------------|---------|
| Wire Range [AWG] | 26 ~ 14 |
|------------------|---------|

IEC ( 60947-7-2 )

|                                |         |
|--------------------------------|---------|
| Soild [mm²]                    | 0.2-1.5 |
| Flexible [mm²]                 | 0.2-1.5 |
| Flexible with ferrule [mm²]    | 0.2-1.5 |
| Overvoltage Category           | III     |
| Contamination Class            | 3       |
| Impulse withstand voltage [KV] | 6       |

Material


|                     |      |
|---------------------|------|
| Insulation Material | PA66 |
|---------------------|------|

|                              |              |
|------------------------------|--------------|
| Flame retardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |


Other Date

|                              |               |
|------------------------------|---------------|
| Length/Height/Thickness [mm] | 72.4/35.4/4.2 |
| Stripping Length [mm]        | 8-10          |

Dimensions

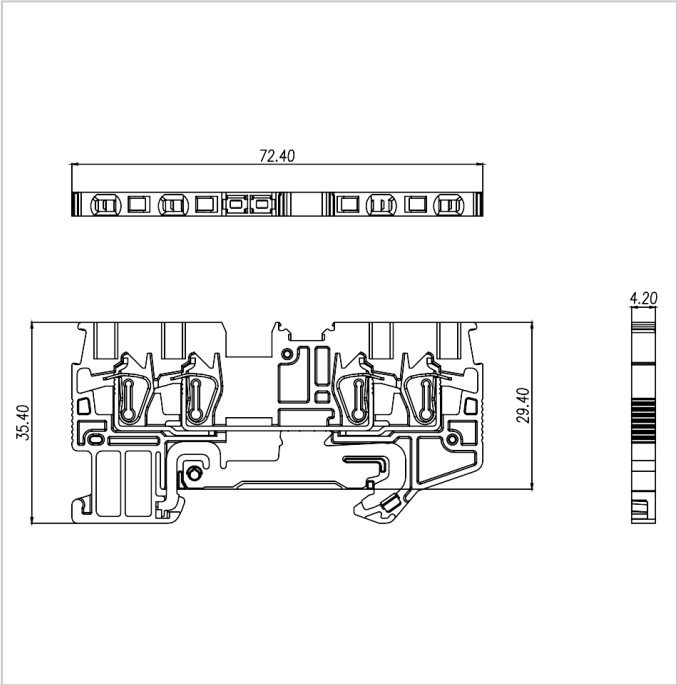


Accessories



FUSA1.5-XX




DUV2.5-104




MUS1.5-10



PUS1.5-120



EB-35




EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D