


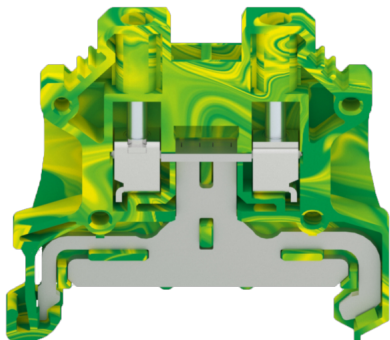

Use wire diameter: 26-12AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL ( 1059 )

|                  |         |
|------------------|---------|
| Wire Range [AWG] | 26 ~ 12 |
|------------------|---------|

IEC ( 60947-7-2 )

|                                |          |
|--------------------------------|----------|
| Soild [mm²]                    | 0.2-4.0  |
| Flexible [mm²]                 | 0.2-2.5  |
| Flexible with ferrule [mm²]    | 0.25-2.5 |
| Overvoltage Category           | III      |
| Contamination Class            | 3        |
| Impulse withstand voltage [KV] | 8        |

Material


|                     |      |
|---------------------|------|
| Insulation Material | PA66 |
|---------------------|------|

|                              |              |
|------------------------------|--------------|
| Flame relardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |


Other Date

|                              |               |
|------------------------------|---------------|
| Length/Height/Thickness [mm] | 44.0/40.0/5.2 |
| Stripping Length [mm]        | 8-9           |
| Screw/Torque [N.m]           | M2.5/0.4-0.5  |


Dimensions

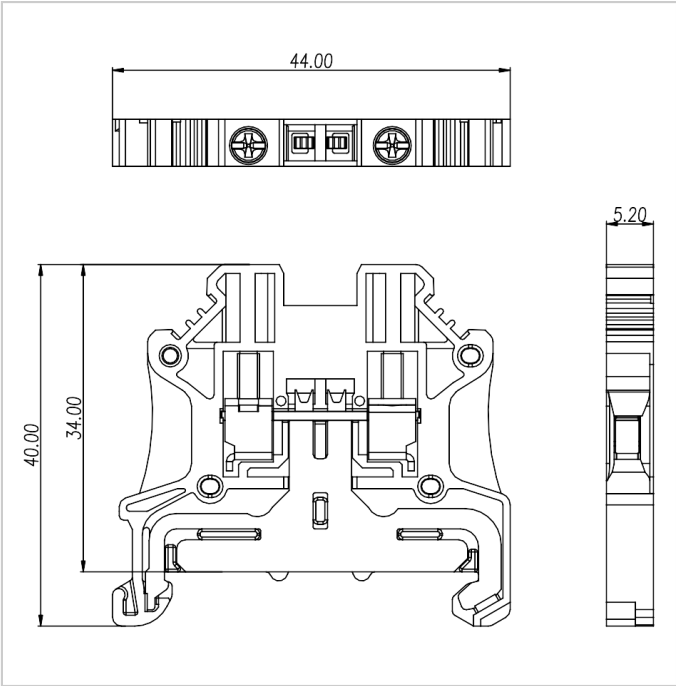

Accessories



FUVA2.5-XX



DUT2.5-102




MUV2.5-10




EB-35



EW-35




EC-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C

DGL2-35x7.5D