


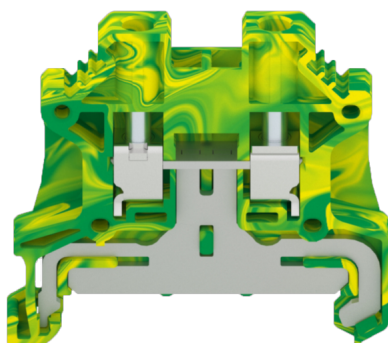

Use wire diameter: 26-10AWG

The catalog is for reference only. The actual
specifications are subject to the product
engineering drawings. version 1.0

UL (1059)

Wire Range [AWG]	26 ~ 10
------------------	---------

IEC (60947-7-2)

Soild [mm ²]	0.2-6.0
Flexible [mm ²]	0.2-4.0
Flexible with ferrule [mm ²]	0.25-4.0
Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	8

Material


Insulation Material	PA66
---------------------	------

Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Date

Length/Height/Thickness [mm]	44.0/40.0/6.2
Stripping Length [mm]	8-9
Screw/Torque [N.m]	M3/0.5-0.6


Dimensions

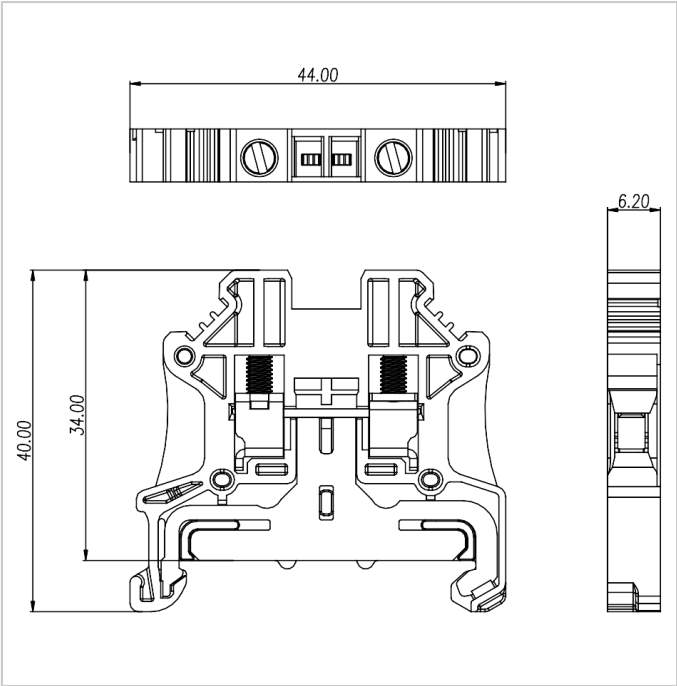

Accessories



FUVA4-XX



DUT2.5-102




MUV4-10




EB-35



EW-35




EC-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C

DGL2-35x7.5D