

Use wire diameter: 16-4AWG

spacing:12.2mm

Install: DGL2-35x7.5

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Wire Range [AWG]	16-4

IEC (60947-7-2)

Soild [mm²]	1.5-25.0
Flexible [mm²]	1.5-16.0
Flexible with ferrule [mm²]	1.5-16.0
Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	8

Material


Insulation Material	PA66

Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated



Other Date

Length/Height/Thickness [mm]	50.0/49.4/12.2
Stripping Length [mm]	12
Screw/Torque [N.m]	M5/2.4-2.5


Dimensions

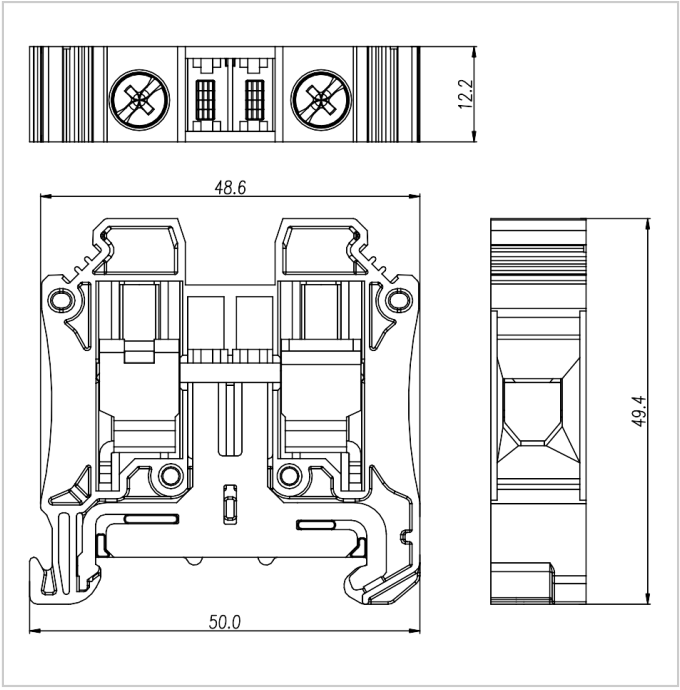

Accessories

DUT16-102




MUV10-10



EB-35



EW-35



EC-35



DGL2-35x7.5A



DGL2-35x7.5B

DGL2-35x7.5C

DGL2-35x7.5D