




Rated current: 85A

Rated voltage: 600V

Use wire diameter: 22-4AWG

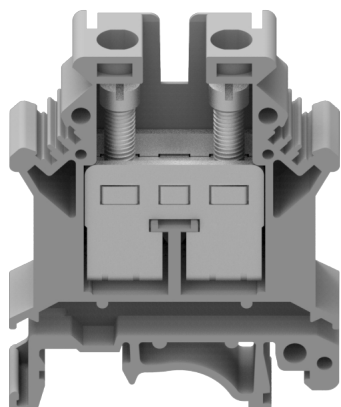

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Use Group	B	C	D
Rate Voltage [V]	600	600	600
Rated Current [A]	85	85	5
Wire Range [AWG]	22-4		

IEC (60947-7-1)

Rated Voltage [V]	800
Rated Current [A]	76
Soild [mm ²]	2.5-25.0
Flexible [mm ²]	4.0-16.0
Flexible with ferrule [mm ²]	1.5-16.0

Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	8


Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Ni plated

Other Data

Length/Height/Thickness [mm]	42.5/52.8/12.2
Stripping Length [mm]	11-12
Screw/Torque [N.m]	M4/1.5-1.8


Dimensions

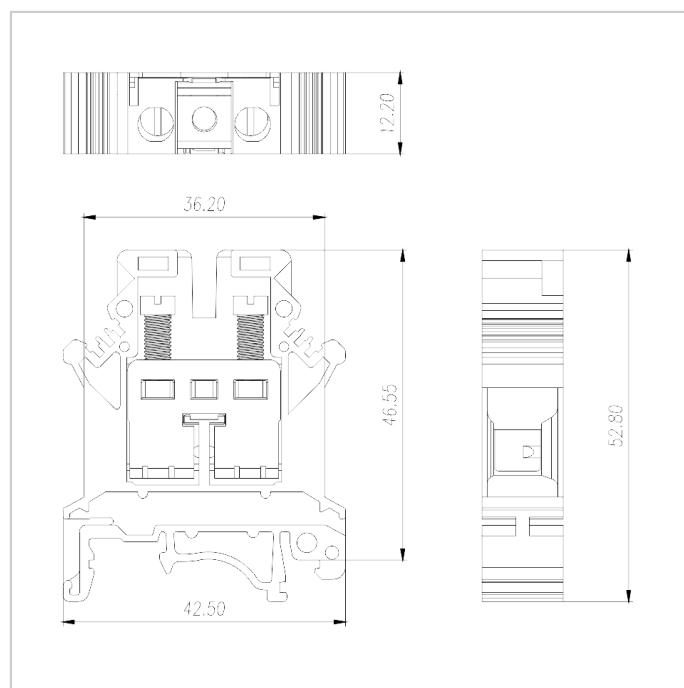


Accessories




D-GUK16-102



MUV10-10



EB-35




EW-35



EC-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D