

Use wire diameter: 24-10AWG



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

| | |
|------------------|-------|
| Wire Range [AWG] | 24-10 |
|------------------|-------|

IEC (60947-7-2)

| | |
|--|----------|
| Soild [mm ²] | 0.2-6.0 |
| Flexible [mm ²] | 0.2-4.0 |
| Flexible with ferrule [mm ²] | 0.25-2.5 |
| Overvoltage Category | III |
| Contamination Class | 3 |

Material

| | |
|---------------------|------|
| Insulation Material | PA66 |
|---------------------|------|

GUSLKG5-102-PE

GUK Universal combination terminal block

Download Date:2026-03-19




| | |
|------------------------------|--------------|
| Flame retardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Ni plated |

Other Date

| | |
|------------------------------|----------------|
| Length/Height/Thickness [mm] | 42.5/46.02/6.2 |
| Stripping Length [mm] | 8 |
| Screw/Torque [N.m] | M3/0.6-0.8 |

Dimensions

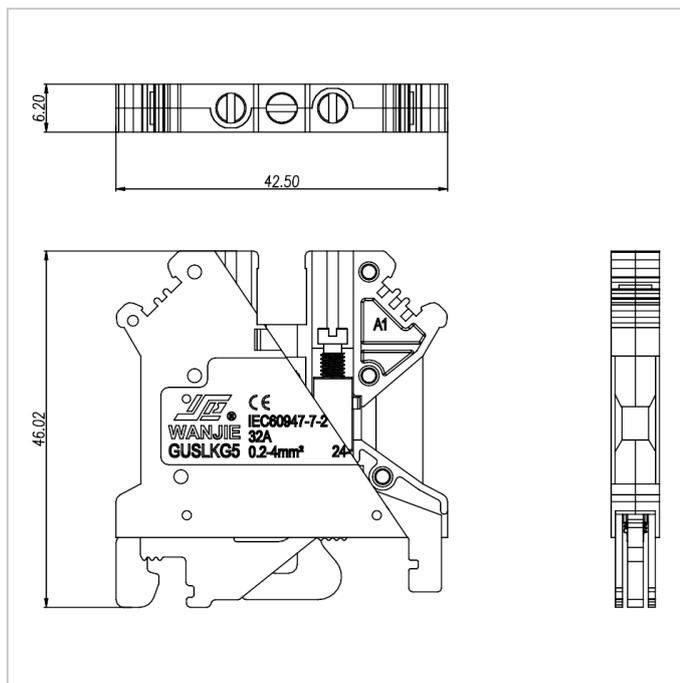

Accessories



MUV4-10



EB-35



EW-35



EC-35



DGL2-35x7.5A



DGL2-35x7.5B

DGL2-35x7.5C

DGL2-35x7.5D