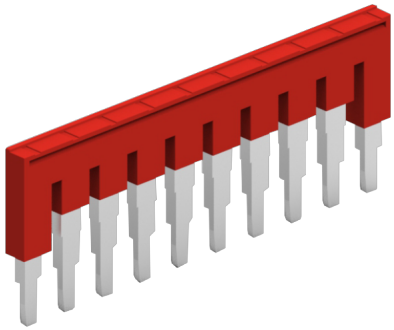



Rated current: 32A

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

Other Date

Poles [P]	2-10
Rated Current [MAX][A]	32
Insulation Material	PA66
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Dimensions

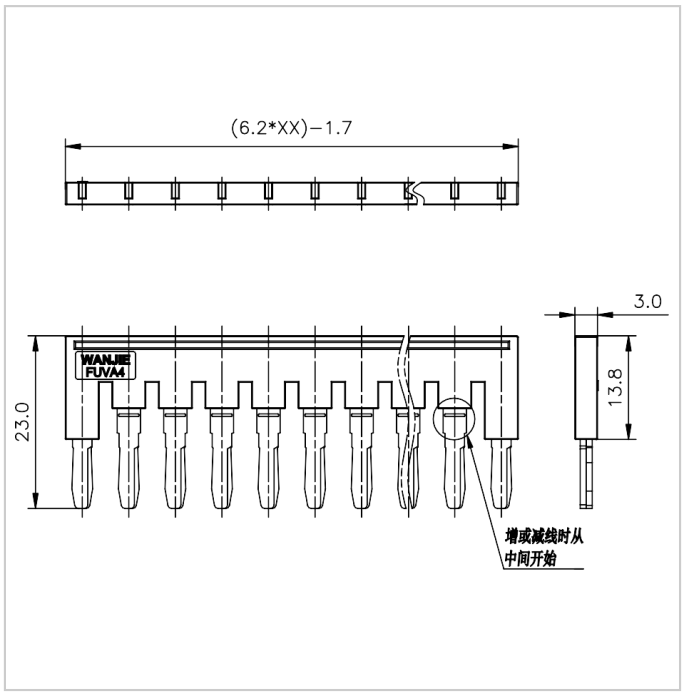
(6.2*XX)-1.7
3.0
13.8
23.0
WANJIE
FUVA4
增或减线时从
中间开始