

M12 Male Panel Mount, PCB Type, Rear Fastened



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

Connector Series: M12

Gender	Male
Coding	A,B,C,D
Locking Type	Fix Screw
Mounting Type	Rear Fastened
Part No	M12-X**-ST0-M01-BH*

Technical Data

Standard	IEC61076-2-101
Ambient Temperatur	-40℃~+105℃
Insulation Resistance	≥100MΩ
Contact Resistance	≤5mΩ

IP Class	IP67
Mating Endurance	>100 Mating Cycles

Material Data

Connector Carriers	PA
Connector Contacts	Copper Alloy With Gold Plated
Connector Nut/Screw	Copper Alloy With Nickel Plated
Shielding	Unshielded
Seal/O-Ring	FKM
Length of the Solder Pin	6mm

Electrical Data & Mechanical Date

Contacts Pin [Pins]	3	4	5	6	8	12	17
Rated Current [A]	4	4	4/2	2	2	1.5	1.5
Voltage AC/DC [V]	250/250	250/250	60/60	30/30	30/30	30/30	30/30
Contacts Termination	PCB Version						


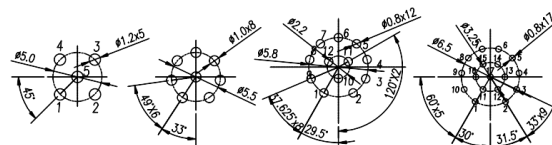
Dimensions

PCB hole diagram

M12 Circular Connector



WANJIETECH

Pin OD: $\varnothing 1.0$ (3P/4P/5P) Pin OD: $\varnothing 0.8$ (8P) Pin OD: $\varnothing 0.6$ (12P) Pin OD: $\varnothing 0.6$ (17P)A close-up photograph of a cable connector, showing a black plastic housing and a silver-colored metal contact point.

A close-up photograph of a cable connector. It features a black, cylindrical, textured body that tapers towards a silver-colored, knurled metal fitting. A black cable is attached to the wider end of the black body. The background is plain white.



M12-X**-ST0-M01-BH*

M12 Circular Connector

Download Date:2026-08-11



M12-X**-ST0-F02-BV*-XXX



M12-X**-ST0-F02-BFM



M12-X**-ST2-M02-BF*



M12-X**-ST0-F02-BMT



M12-X**-ST0-F02-SC*-XXX



M12-X**-RA0-F02-SC*-XXX



M12-X**-ST2-F02-SC*-XXX



M12-X**-ST0-F02-SV*-XXX



M12-X**-ST0-F04-PS*



M12-X**-RA0-F04-PS*



M12-X**-ST2-F04-BS*



M12-X**-RA2-F04-BS*

