

M12 Male Panel Mount, Solder Type, Rear Fastened



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

Connector Series: M12

|               |                     |
|---------------|---------------------|
| Gender        | Male                |
| Coding        | A,B,C,D             |
| Locking Type  | Fix Screw           |
| Mounting Type | Rear Fastened       |
| Part No       | M12-X**-ST0-M02-BH* |

Technical Data

|                       |                |
|-----------------------|----------------|
| Standard              | IEC61076-2-101 |
| Ambient Temperatur    | -40℃~+105℃     |
| Insulation Resistance | ≥100MΩ         |
| Contact Resistance    | ≤5mΩ           |

|                  |                    |
|------------------|--------------------|
| IP Class         | IP67               |
| Mating Endurance | >100 Mating Cycles |


Material Data

|                      |                                     |
|----------------------|-------------------------------------|
| Connector Carriers   | PA                                  |
| Connector Contacts   | Copper Alloy With Gold Plated 铜镀金   |
| Connector Nut/Screw  | Copper Alloy With Nickel Plated 铜镀镍 |
| Shielding            | Unshielded 非屏蔽                      |
| Seal/O-Ring          | FKM 氟橡胶                             |
| Contacts Termination | Solder Type 焊接式                     |

Electrical Data & Mechanical Date

|                     |         |         |                          |         |         |         |         |
|---------------------|---------|---------|--------------------------|---------|---------|---------|---------|
| Contacts Pin [Pins] | 3       | 4       | 5                        | 6       | 8       | 12      | 17      |
| Rated Current [A]   | 4       | 4       | 4/2                      | 2       | 2       | 1.5     | 1.5     |
| Voltage AC/DC [V]   | 250/250 | 250/250 | 60/60                    | 30/30   | 30/30   | 30/30   | 30/30   |
| Wire Range AWG/mm²  | 22/0.34 | 22/0.34 | 22,24/0.34,0.25 (C-code) | 24/0.25 | 24/0.25 | 26/0.14 | 26/0.14 |

Dimensions

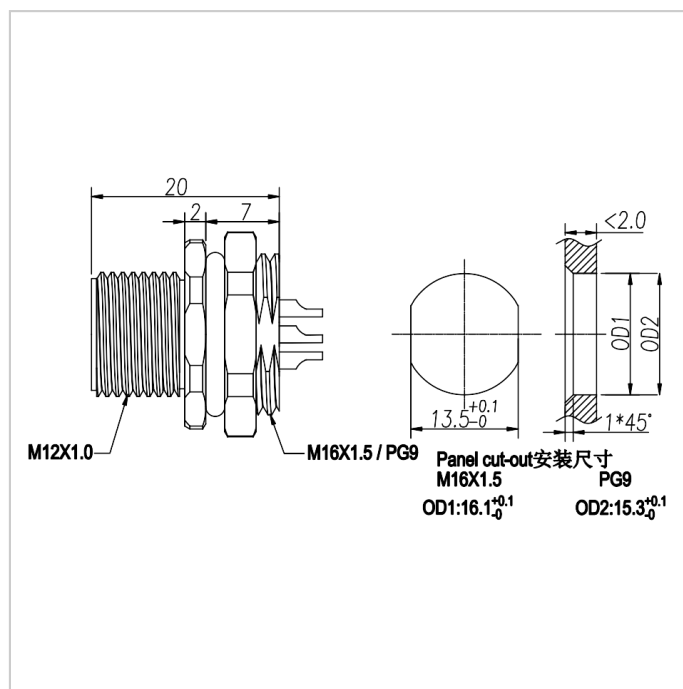

## Accessories



M12-X\*\*-ST0-F02-BC\*-XXX



M12-X\*\*-RA0-F02-BC\*-XXX



M12-X\*\*-ST2-F02-BC\*-XXX



M12-X\*\*-RA2-F02-BC\*-XXX



M12-X\*\*-ST0-F02-BC\*-XXX



M12-X\*\*-ST0-F02-BC\*-XXX



M12-X\*\*-ST0-F02-BV\*-XXX



M12-X\*\*-ST0-F02-BFM



M12-X\*\*-ST2-M02-BF\*



M12-X\*\*-ST0-F02-BMT



M12-X\*\*-ST0-F02-SC\*-XXX



M12-X\*\*-RA0-F02-SC\*-XXX



M12-X\*\*-ST2-F02-SC\*-XXX



M12-X\*\*-ST0-F02-SV\*-XXX



M12-X\*\*-ST0-F04-PS\*



M12-X\*\*-RA0-F04-PS\*



M12-X\*\*-ST2-F04-BS\*



M12-X\*\*-RA2-F04-BS\*

