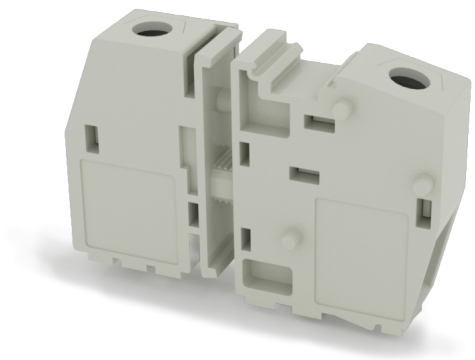


Through-wall Terminal Block

Rated current: 65A

Rated voltage: 300V

Use wire diameter: 24-6AWG

spacing:/

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	150	300
Rated Current [A]	65	65	10
Wire Range [AWG]		24-6	
Dielectric Voltage-Withstand		1.6KV	

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	400	500	1000
Rated Current [A]	57	57	57

Impulse withstand voltage [KV]	6	6	6
Conductor cross section [mm²]	0.5-16.0		


Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Date

Pitch/Poles [mm]/[P]	10.0/XX=01P
Stripping Length [mm]	10
Screw/Torque(Max)[N.m]	M4/1.2
Operating temperature [℃]	-40～+105


Dimensions

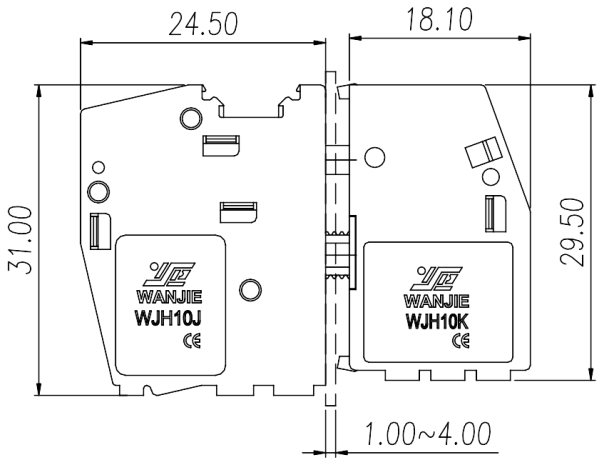

PCB hole diagram

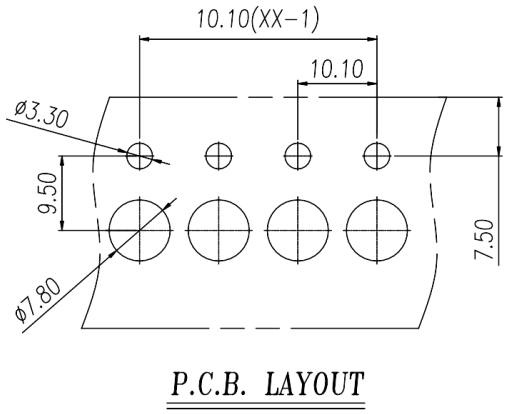

Accessories



MUV10-10