


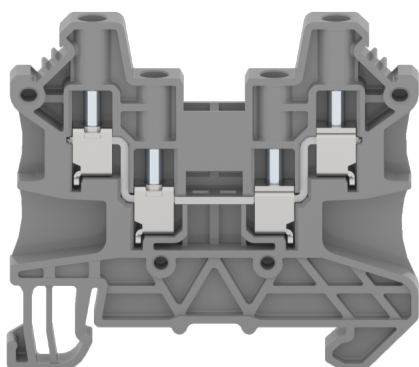

Rated current: 25A

Rated voltage: 600V

Use wire diameter: 26-12AWG

The catalog is for reference only. The actual
specifications are subject to the product
engineering drawings. version 1.0

UL (1059)

Use Group	B	C	D
Rate Voltage [V]	600	600	600
Rated Current [A]	25	25	5
Wire Range [AWG]	26 ~ 12		

IEC (60947-7-1)

Rated Voltage [V]	1000
Rated Current [A]	24
Soild [mm ²]	0.2-4.0
Flexible [mm ²]	0.2-2.5
Flexible with ferrule [mm ²]	0.25-2.5

Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	8

Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Date

Length/Height/Thickness [mm]	54.4/47.7/5.2
Stripping Length [mm]	8-9
Screw/Torque [N.m]	M2.5/0.4-0.5

Dimensions

