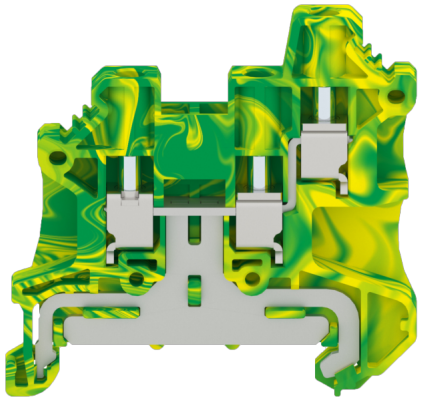


Use wire diameter: 26-10AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL ( 1059 )

| | |
|---|---|
| Wire Range [AWG] | 26～10 |

## IEC ( 60947-7-2 )

| | |
|---|---|
| Soild [mm²] | 0.2-6.0 |
| Flexible [mm²] | 0.2-4.0 |
| Flexible with ferrule [mm²] | 0.25-4.0 |
| Overvoltage Category | III |
| Contamination Class | 3 |
| Impulse withstand voltage [KV] | 8 |

## Material


| | |
|---|---|
| Insulation Material | PA66 |

| | |
|---|---|
| Flame relardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |




## Other Date

| | |
|---|---|
| Length/Height/Thickness [mm] | 50.0/47.7/6.2 |
| Stripping Length [mm] | 8-9 |
| Screw/Torque [N.m] | M3.0/0.5-0.6 |

## Dimensions

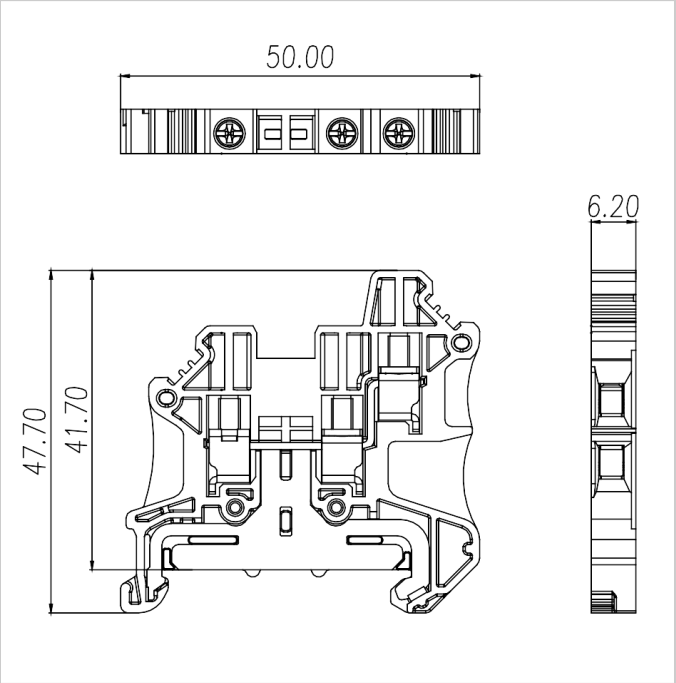


## Accessories


MUV4-10



EB-35



EW-35



EC-35

DGL2-35x7.5A

DGL2-35x7.5B





DGL2-35x7.5C

DGL2-35x7.5D