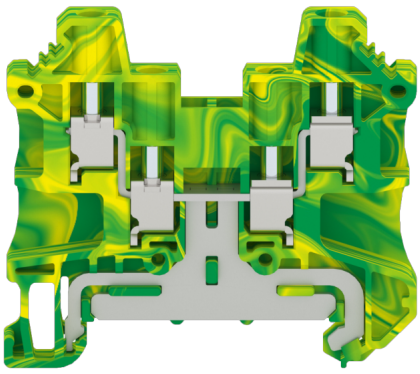


Use wire diameter: 26-10AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Wire Range [AWG]	26～10

IEC (60947-7-2)

Soild [mm²]	0.2-6.0
Flexible [mm²]	0.2-4.0
Flexible with ferrule [mm²]	0.25-4.0
Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	8

Material


Insulation Material	PA66

Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Date


Length/Height/Thickness [mm]	54.4/47.7/6.2
Stripping Length [mm]	8-9
Screw/Torque [N.m]	M3.0/0.5-0.6

Dimensions

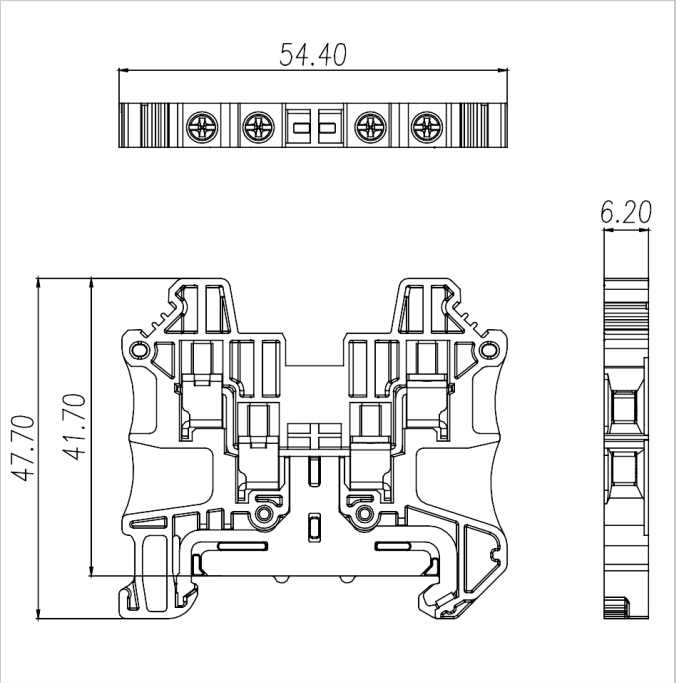


Accessories





DUT2.5-104




MUV4-10



EB-35



EW-35



EC-35



DGL2-35x7.5A



DGL2-35x7.5B

DGL2-35x7.5C

DGL2-35x7.5D