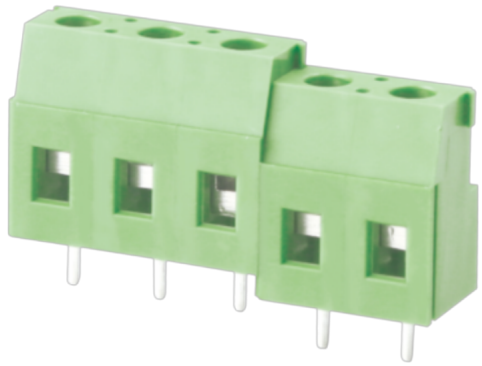


Rated current: 20A

Rated voltage: 300V

Use wire diameter: 26-12AWG

spacing:7.62mm

Install: Wave soldering

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	150	300
Rated Current [A]	20	20	10
Wire Range [AWG]		26～12	
Dielectric Voltage-Withstand		1.6KV	

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	450	630	1000
Rated Current [A]	24	24	24

Impulse withstand voltage [KV]	6	6	6
Conductor cross section [mm²]	0.5~2.5		

Material

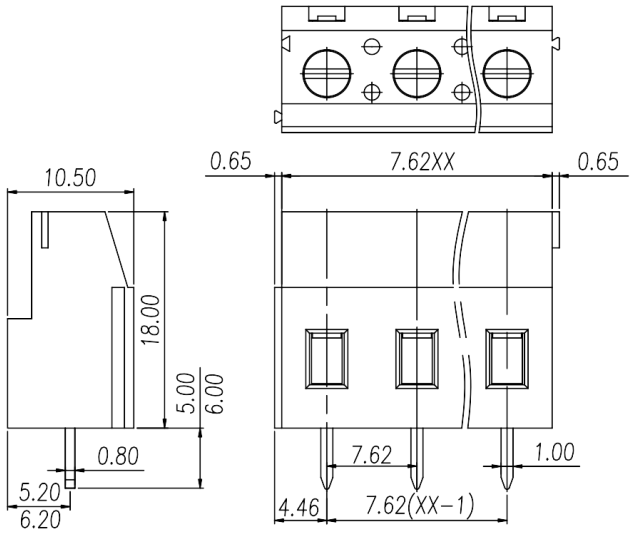
Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

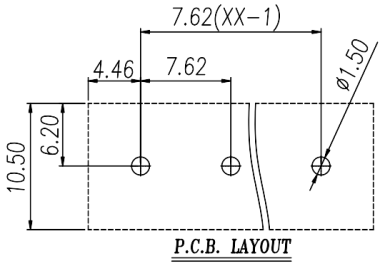
Other Date

Pitch/Poles [mm]/[P]	7.62/2-24
Stripping Length [mm]	6-7
Screw/Torque(Max)[N.m]	M3/0.5
Operating temperature [℃]	-40 ~ +105
Soldering method	Wave soldering
Pin dimensions [mm]	0.8*1.0
PCB Hole Diameter [mm]	Ø1.5

Dimensions

PCB hole diagram


10.50
0.65
7.62XX
0.65
18.00
5.00
6.00
0.80
5.20
6.20
7.62
1.00
4.46
7.62(XX-1)


7.62(XX-1)
4.46
7.62
Ø1.50
6.20
10.50
P.C.B. LAYOUT