


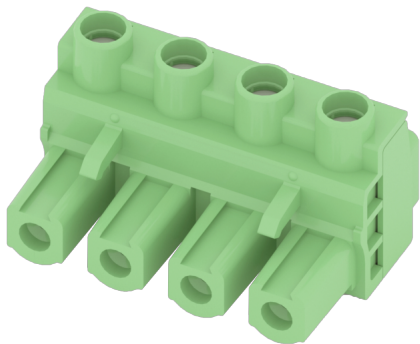

Rated current: 20A  
Rated voltage: 600V  
Use wire diameter: 30-12AWG  
spacing:7.62mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

| Use Group                    | B     | C   | D |
|------------------------------|-------|-----|---|
| Rate Voltage [V]             | 600   | 600 | - |
| Rated Current [A]            | 20    | 20  | - |
| Wire Range [AWG]             | 30-12 |     |   |
| Dielectric Voltage-Withstand | 2.2KV |     |   |

IEC

| Overvoltage Category | III  | III  | II   |
|----------------------|------|------|------|
| Contamination Class  | 3    | 2    | 2    |
| Rated Voltage [V]    | 1000 | 1000 | 1000 |
| Rated Current [A]    | 16   | 16   | 16   |

|                                |         |   |   |
|--------------------------------|---------|---|---|
| Impulse withstand voltage [KV] | 8       | 8 | 6 |
| Conductor cross section [mm²]  | 0.2-2.5 |   |   |


## Material

|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame retardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

## Other Data

|                            |            |
|----------------------------|------------|
| Pitch/Poles [mm]/[P]       | 7.62/2-12  |
| Stripping Length [mm]      | 8          |
| Screw/Torque(Max)[N.m]     | M3/0.5     |
| Operating temperature [°C] | -40 ~ +105 |

## Dimensions

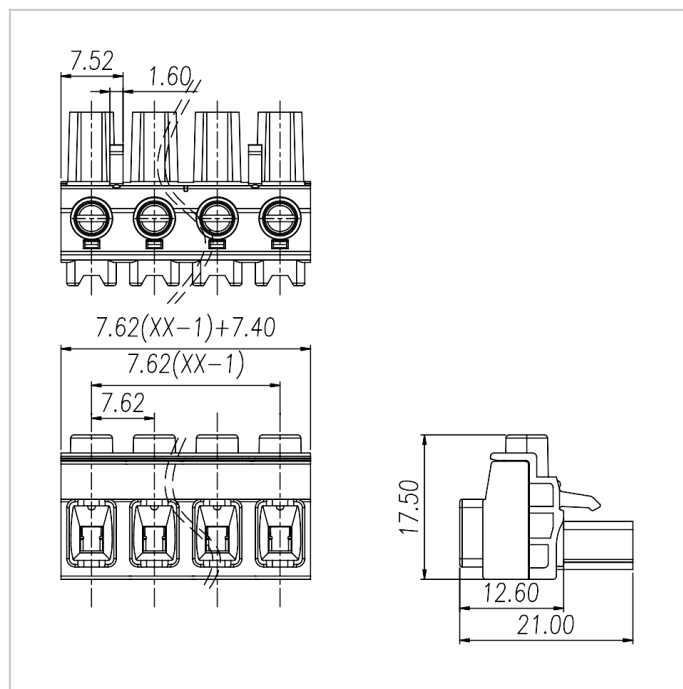

## Accessories



WJ2EDGV-7.62



WJ2EDGR-7.62



WJ2EDGVC-7.62



WJ2EDGRC-7.62



WJ2KHR-7.62