

Rated current: 10A  
Rated voltage: 300V  
Use wire diameter: 28-12AWG  
spacing:7.62mm



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

| Use Group                    | B     | C | D   |
|------------------------------|-------|---|-----|
| Rate Voltage [V]             | 300   | - | 300 |
| Rated Current [A]            | 10    | - | 10  |
| Wire Range [AWG]             | 28-12 |   |     |
| Dielectric Voltage-Withstand | 1.6KV |   |     |

IEC

|                        |     |     |      |
|------------------------|-----|-----|------|
| 过电Overvoltage Category | III | III | II   |
| Contamination Class    | 3   | 2   | 2    |
| Rated Voltage [V]      | 400 | 630 | 1000 |
| Rated Current [A]      | 12  | 12  | 12   |

|                                |         |   |   |
|--------------------------------|---------|---|---|
| Impulse withstand voltage [KV] | 6       | 6 | 6 |
| Conductor cross section [mm²]  | 0.2-2.5 |   |   |


Material

|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame relardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

Other Date

|                            |            |
|----------------------------|------------|
| Pitch/Poles [mm]/[P]       | 7.62/2-24  |
| Stripping Length [mm]      | 9-10       |
| Screw/Torque(Max)[N.m]     | -          |
| Operating temperature [°C] | -40 ~ +105 |

Dimensions

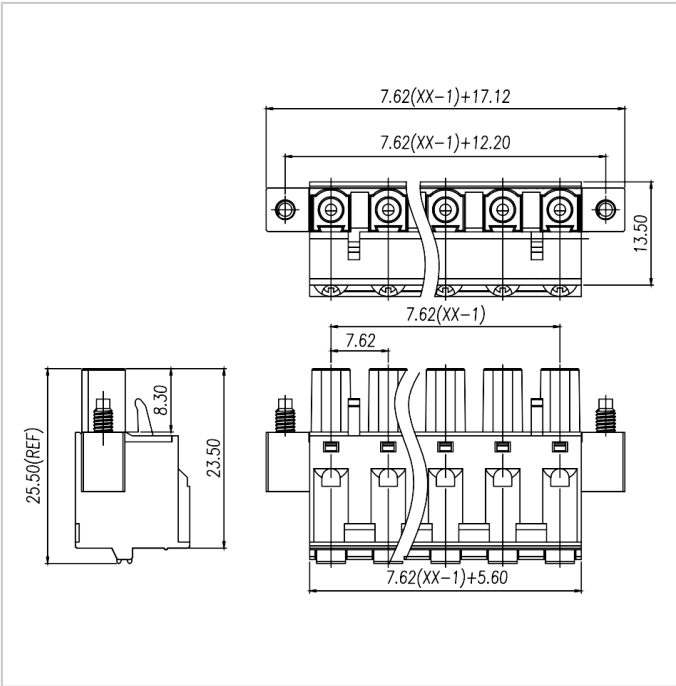

## Accessories



WJ2EDGVM-7.62




WJ2EDGRM-7.62



WJ2EDGKRN-7.62

## Matching components



WJ2EDG-PWI