

Rated current: 15A

Rated voltage: 600V

spacing:10.16mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	600	-	600
Rated Current [A]	15	-	5
Wire Range [AWG]		-	
Dielectric Voltage-Withstand		2.2KV	

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	630	1000	1000
Rated Current [A]	15	15	15

Impulse withstand voltage [KV]	8	8	8
Conductor cross section [mm²]		-	

Material

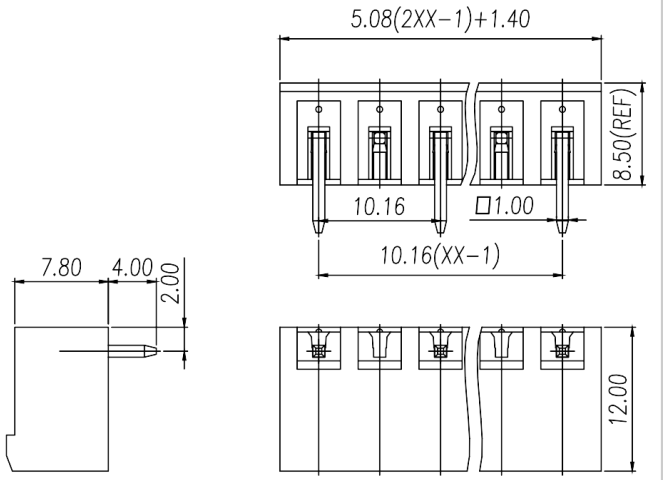
Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

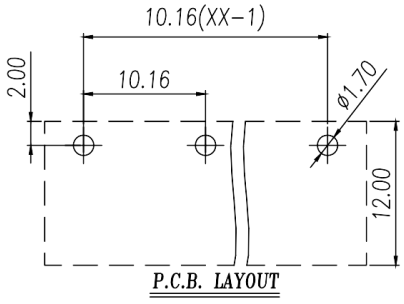
Other Date

Pitch/Poles [mm]/[P]	10.16/2-12
Stripping Length [mm]	-
Screw/Torque(Max)[N.m]	-
Operating temperature [℃]	-40～+105
Soldering method	Wave soldering
Pin dimensions [mm]	1.0*1.0
PCB Hole Diameter [mm]	Ø1.7

Dimensions

PCB hole diagram


5.08(2XX−1)+1.40
8.50(REF)
10.16
□1.00
10.16(XX−1)
7.80
4.00
2.00
12.00


10.16(XX−1)
10.16
2.00
Ø1.70
12.00
P.C.B. LAYOUT