



Rated current: 15A  
Rated voltage: 300V  
Use wire diameter: 28-12AWG  
spacing:5.0mm



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

| Use Group                    | B     | C | D   |
|------------------------------|-------|---|-----|
| Rate Voltage [V]             | 300   | - | 300 |
| Rated Current [A]            | 15    | - | 10  |
| Wire Range [AWG]             | 28-12 |   |     |
| Dielectric Voltage-Withstand | 1.6KV |   |     |

IEC

| Overvoltage Category | III | III | II  |
|----------------------|-----|-----|-----|
| Contamination Class  | 3   | 2   | 2   |
| Rated Voltage [V]    | 320 | 320 | 630 |
| Rated Current [A]    | 12  | 12  | 12  |

|                                |         |   |   |
|--------------------------------|---------|---|---|
| Impulse withstand voltage [KV] | 4       | 4 | 4 |
| Conductor cross section [mm²]  | 0.2-2.5 |   |   |


Material

|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame relardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

Other Date

|                            |            |
|----------------------------|------------|
| Pitch/Poles [mm]/[P]       | 5.0/2-24   |
| Stripping Length [mm]      | 7-8        |
| Screw/Torque(Max)[N.m]     | M3/0.5     |
| Operating temperature [°C] | -40 ~ +105 |

Dimensions

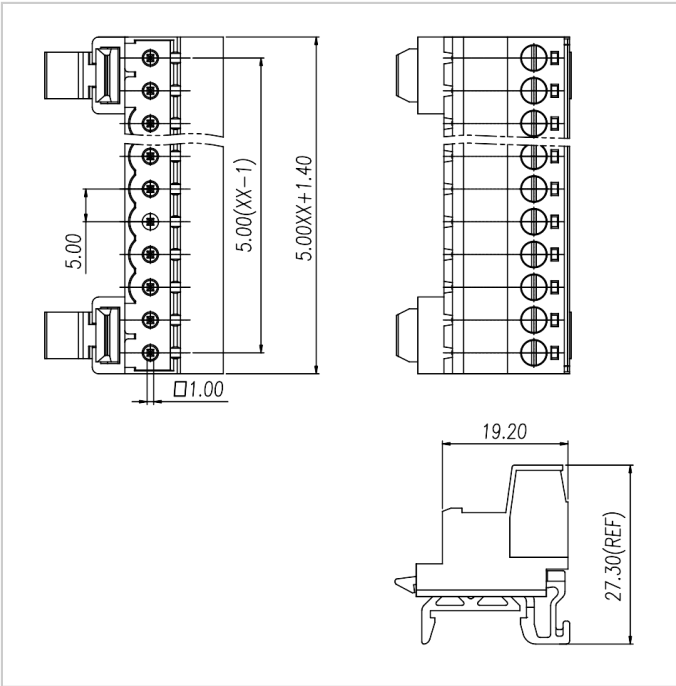

## Accessories



WJ2EDGK-5.0



WJ2EDGKA-5.0



WJ2EDGKB-5.0



WJ2EDGKC-5.0



WJ2EDGKD-5.0



WJ2EDGKDA-5.0



WJ2EDGKDB-5.0



WJ2EDGKF-5.0



WJ2EDGKZ-5.0