



Rated current: 15A
 Rated voltage: 300V
 Use wire diameter: 28-12AWG
 spacing:7.62mm



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

| Use Group | B | C | D |
|------------------------------|-------|---|-----|
| Rate Voltage [V] | 300 | - | 300 |
| Rated Current [A] | 15 | - | 10 |
| Wire Range [AWG] | 28-12 | | |
| Dielectric Voltage-Withstand | 1.6KV | | |

IEC

| Overvoltage Category | III | III | II |
|----------------------|-----|-----|-----|
| Contamination Class | 3 | 2 | 2 |
| Rated Voltage [V] | 320 | 320 | 630 |
| Rated Current [A] | 12 | 12 | 12 |

| | | | |
|--|----------|---|---|
| Impulse withstand voltage [KV] | 6 | 6 | 6 |
| Conductor cross section [mm ²] | 0.25-2.5 | | |


Material

| | |
|------------------------------|--------------|
| Insulation Material | PA66 |
| Flame retardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |

Other Data

| | |
|----------------------------|------------|
| Pitch/Poles [mm]/[P] | 7.62/2-24 |
| Stripping Length [mm] | 8-9 |
| Screw/Torque(Max)[N.m] | - |
| Operating temperature [°C] | -40 ~ +105 |
| Soldering temperature | - |
| Pin dimensions [mm] | - |
| PCB Hole Diameter [mm] | - |

Dimensions

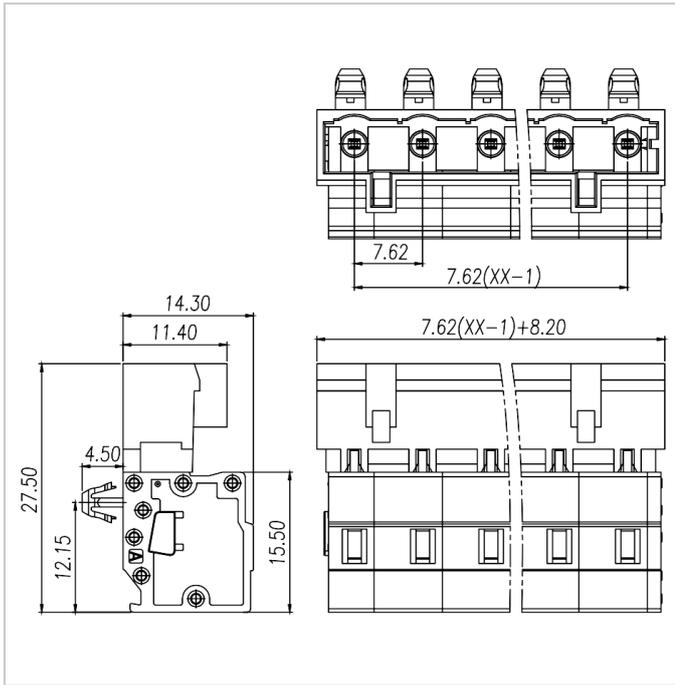

Accessories



WJ0701-02XX



WJ0701-04XX



WJ0701-06XX



WJ0701-08XX



WJ0705-02XX



WJ0705-04XX