

额定电流: 15A  
额定电压: 300V  
使用线径: 26-14AWG

UL

目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL ( 1059 )

| 等级 Use Group           | B       | C   | D   |
|------------------------|---------|-----|-----|
| 额定电压 Rate Voltage [V]  | 300     | 300 | 600 |
| 额定电流 Rated Current [A] | 15      | 15  | 5   |
| 接线范围 Wire Range [AWG]  | 26 ~ 14 |     |     |

技术参数-IEC ( 60947-7-1 )

|                                      |         |
|--------------------------------------|---------|
| 额定电压 Rated Voltage [V]               | 500     |
| 额定电流 Rated Current [A]               | 17.5    |
| 单芯 Soild [mm²]                       | 0.2-1.5 |
| 柔性导线 Flexible [mm²]                  | 0.2-1.5 |
| 柔性导线带冷压头 Flexible with ferrule [mm²] | 0.2-1.0 |
| 过电压类别 Overvoltage Category           | III     |

|                                       |   |
|---------------------------------------|---|
| 污染等级 Contamination Class              | 3 |
| 额定冲击电压 Impulse withstand voltage [KV] | 6 |


材料 Material

|                                     |              |
|-------------------------------------|--------------|
| 绝缘材料 Insulation Material            | PA66         |
| 阻燃等级 Flame relardant rating         | UL94V-0      |
| 导体材料 Conductor Material             | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Sn plated    |


一般参数 Other Date

|                                    |               |
|------------------------------------|---------------|
| 长/高/厚 Length/Height/Thickness [mm] | 54.2/30.6/3.5 |
| 剥线长度 Stripping Length [mm]         | 8-10          |

尺寸图

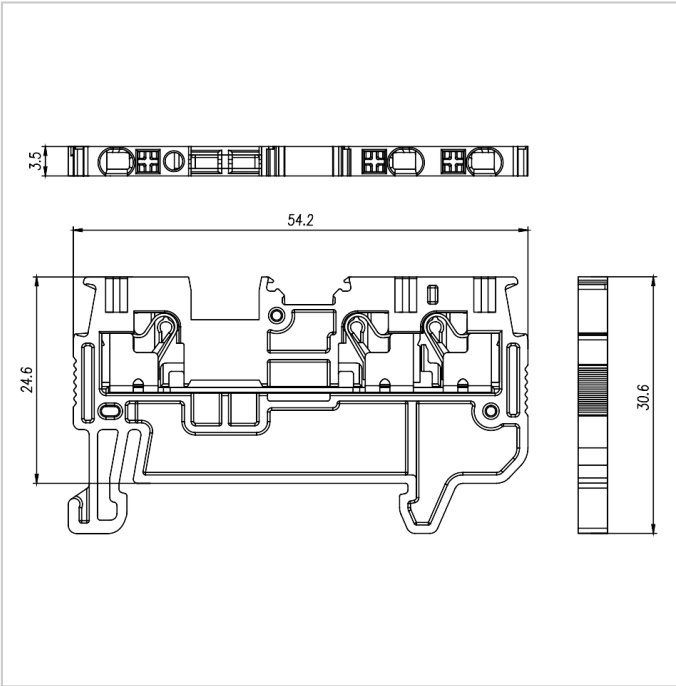

适配产品



FUVA1.5-XX




DUV1.5-103




MUV1.5-10



PUV1.5-144




EB-35




EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D