


使用线径: 26-14AWG

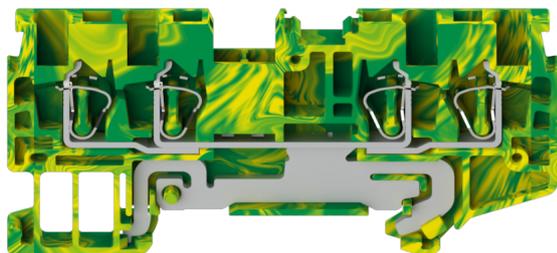

目录仅供参考，实际规格依产品工程图为准 版本1.0

### 技术数据-UL ( 1059 )

接线范围 Wire Range [AWG]	26 ~ 14
-----------------------	---------

### 技术参数-IEC ( 60947-7-2 )


单芯 Solid [mm <sup>2</sup> ]	0.2-1.5
柔性导线 Flexible [mm <sup>2</sup> ]	0.2-1.5
柔性导线带冷压头 Flexible with ferrule [mm <sup>2</sup> ]	0.2-1.5
过电压类别 Overvoltage Category	III
污染等级 Contamination Class	3
额定冲击电压 Impulse withstand voltage [KV]	6

### 材料 Material

绝缘材料 Insulation Material	PA66
阻燃等级 Flame retardant rating	UL94V-0

导体材料 Conductor Material	Copper alloy
导体表面镀层 Plating of conductor surface	Sn plated
一般参数 Other Date	
长/高/厚 Length/Height/Thickness [mm]	72.4/35.4/4.2
剥线长度 Stripping Length [mm]	8-10

## 尺寸图

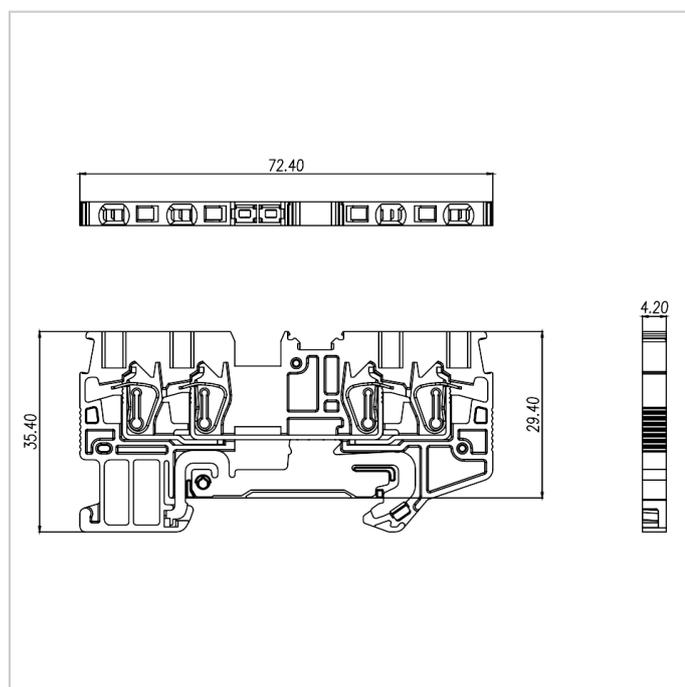

## 适配产品



FUSA1.5-XX



DUV2.5-104



MUS1.5-10



PUS1.5-120



EB-35



EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D