

插拔式连接器

额定电流: 5A

额定电压: 150V

使用线径: 30-20AWG

间距:2.54mm

安装: 直插式弹簧连接



目录仅供参考，实际规格依产品工程图为准 版本1.0

## 技术数据-UL/CUL


| 等级 Use Group                     | B     | C | D |
|----------------------------------|-------|---|---|
| 额定电压 Rate Voltage [V]            | 150   | - | - |
| 额定电流 Rated Current [A]           | 5     | - | - |
| 接线范围 Wire Range [AWG]            | 30-20 |   |   |
| 耐电压 Dielectric Voltage-Withstand | 1.3KV |   |   |

## 技术参数-IEC

| 过电压类别 Overvoltage Category            | III | III | II  |
|---------------------------------------|-----|-----|-----|
| 污染等级 Contamination Class              | 3   | 2   | 2   |
| 额定电压 Rated Voltage [V]                | 160 | 160 | 320 |
| 额定电流 Rated Current [A]                | 6   | 6   | 6   |
| 额定冲击电压 Impulse withstand voltage [KV] | 2.5 | 2.5 | 2.5 |

|   |               |
|---|---------------|
| 导线截面积[硬/柔] Conductor cross section [mm <sup>2</sup> ] | 0.2-0.5       |
| <b>材料 Material</b>                                    |               |
| 绝缘材料 Insulation Material                              | PA66          |
| 阻燃等级 Flame retardant rating                           | UL94V-0       |
| 导体材料 Conductor Material                               | Copper alloy  |
| 导体表面镀层 Plating of conductor surface                   | Sn plated     |
| <b>一般参数 Other Date</b>                                |               |
| 间距/极数 Pitch/Poles [mm]/[P]                            | 2.54/2*2-2*24 |
| 剥线长度 Stripping Length [mm]                            | 7-8           |
| 螺丝/扭矩 Screw/Torque(Max)[N.m]                          | -             |
| 工作温度 Operating temperature [°C]                       | -40 ~ +105    |

## 尺寸图

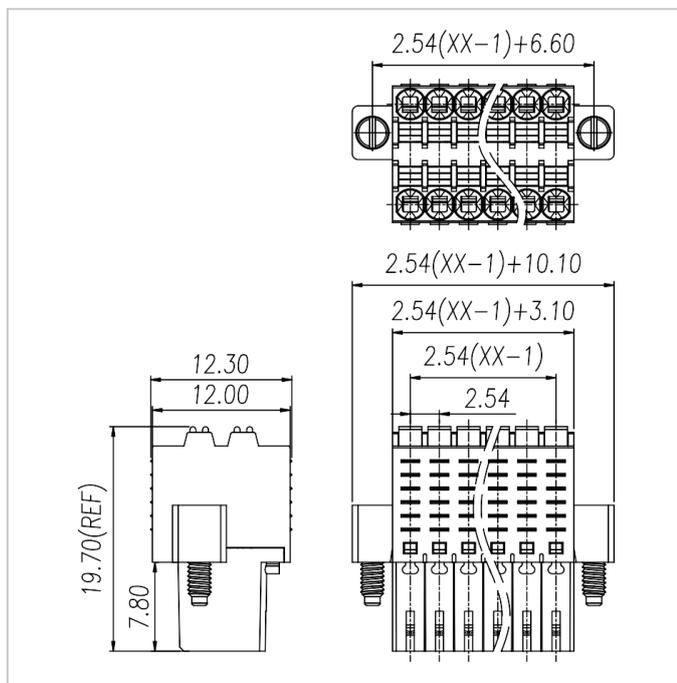

## 适配产品



WJ15EDGVHSM-THR-2.54



WJ15EDGRHSM-THR-2.54