




额定电流: 30A  
额定电压: 300V  
使用线径: 28-10AWG  
间距:7.62mm

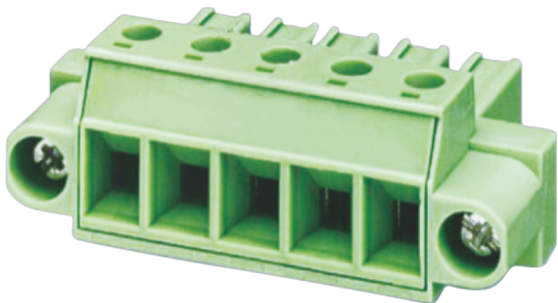

目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL/CUL

| 等级 Use Group                     | B     | C | D   |
|----------------------------------|-------|---|-----|
| 额定电压 Rate Voltage [V]            | 300   | - | 300 |
| 额定电流 Rated Current [A]           | 30    | - | 10  |
| 接线范围 Wire Range [AWG]            | 28-10 |   |     |
| 耐电压 Dielectric Voltage-Withstand | 1.6KV |   |     |

技术参数-IEC

| 过电压类别 Overvoltage Category            | III | III | II   |
|---------------------------------------|-----|-----|------|
| 污染等级 Contamination Class              | 3   | 2   | 2    |
| 额定电压 Rated Voltage [V]                | 400 | 630 | 1000 |
| 额定电流 Rated Current [A]                | 20  | 20  | 20   |
| 额定冲击电压 Impulse withstand voltage [KV] | 6   | 6   | 6    |

|                                          |         |
|------------------------------------------|---------|
| 导线截面积[硬/柔] Conductor cross section [mm²] | 0.5-4.0 |
|------------------------------------------|---------|


材料 Material

|                                     |              |
|-------------------------------------|--------------|
| 绝缘材料 Insulation Material            | PA66         |
| 阻燃等级 Flame relardant rating         | UL94V-0      |
| 导体材料 Conductor Material             | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Sn plated    |

一般参数 Other Date

|                                 |            |
|---------------------------------|------------|
| 间距/极数 Pitch/Poles [mm]/[P]      | 7.62/2-24  |
| 剥线长度 Stripping Length [mm]      | 8-9        |
| 螺丝/扭矩 Screw/Torque(Max)[N.m]    | M3/0.5     |
| 工作温度 Operating temperature [°C] | -40 ~ +105 |

尺寸图

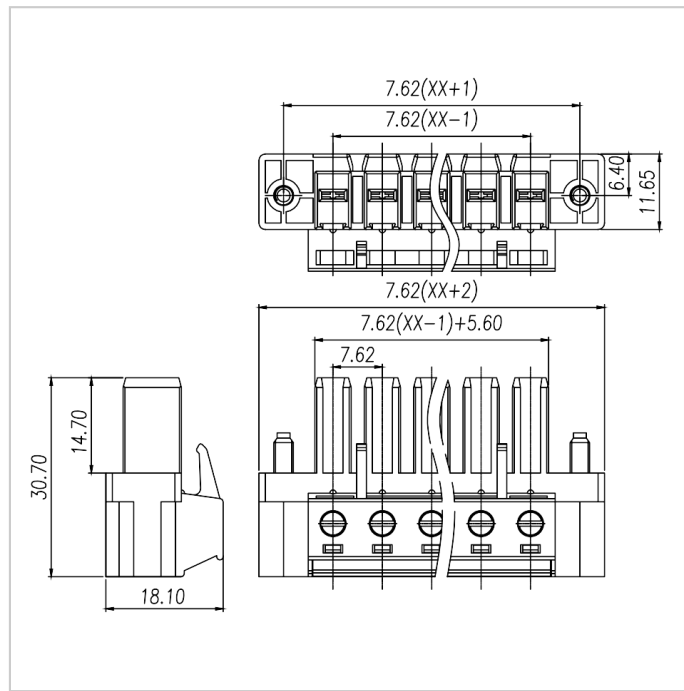

适配产品



WJ3EDGKRN-7.62



WJ3EDGKRP-7.62



WJ3EDGVM-7.62



WJ3EDGVZM-7.62



WJ3EDGRM-7.62



WJ3EDGRZM-7.62



WJ3EDGVHM-7.62



WJ3EDGRHM-7.62



WJ3EDGRRHM-7.62