




额定电流: 4A  
额定电压: 150V  
间距:2.5mm

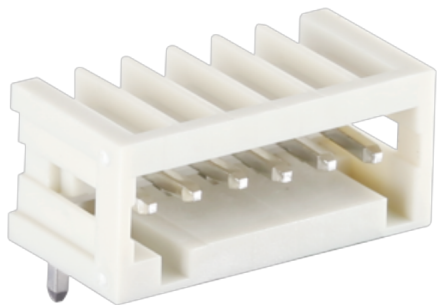

目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL/CUL

| 等级 Use Group                     | B     | C | D   |
|----------------------------------|-------|---|-----|
| 额定电压 Rate Voltage [V]            | 150   | - | 150 |
| 额定电流 Rated Current [A]           | 4     | - | 4   |
| 接线范围 Wire Range [AWG]            | -     |   |     |
| 耐电压 Dielectric Voltage-Withstand | 1.3KV |   |     |

技术参数-IEC

| 过电压类别 Overvoltage Category            | III | III | II  |
|---------------------------------------|-----|-----|-----|
| 污染等级 Contamination Class              | 3   | 2   | 2   |
| 额定电压 Rated Voltage [V]                | 80  | 160 | 320 |
| 额定电流 Rated Current [A]                | 6   | 6   | 6   |
| 额定冲击电压 Impulse withstand voltage [KV] | 2.5 | 2.5 | 2.5 |

|                                          |   |
|------------------------------------------|---|
| 导线截面积[硬/柔] Conductor cross section [mm²] | - |
|------------------------------------------|---|

材料 Material


|                                     |              |
|-------------------------------------|--------------|
| 绝缘材料 Insulation Material            | PA66         |
| 阻燃等级 Flame relardant rating         | UL94V-0      |
| 导体材料 Conductor Material             | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Sn plated    |

一般参数 Other Date

|                                 |                |
|---------------------------------|----------------|
| 间距/极数 Pitch/Poles [mm]/[P]      | 2.5/2-12       |
| 剥线长度 Stripping Length [mm]      | -              |
| 螺丝/扭矩 Screw/Torque(Max)[N.m]    | -              |
| 工作温度 Operating temperature [°C] | -40 ~ +105     |
| 焊接方式 Soldering method           | Wave soldering |
| 引针尺寸 Pin dimensions [mm]        | 0.8*0.8        |
| PCB板孔径 PCB Hole Diameter [mm]   | Ø1.4           |

尺寸图

PCB开孔图

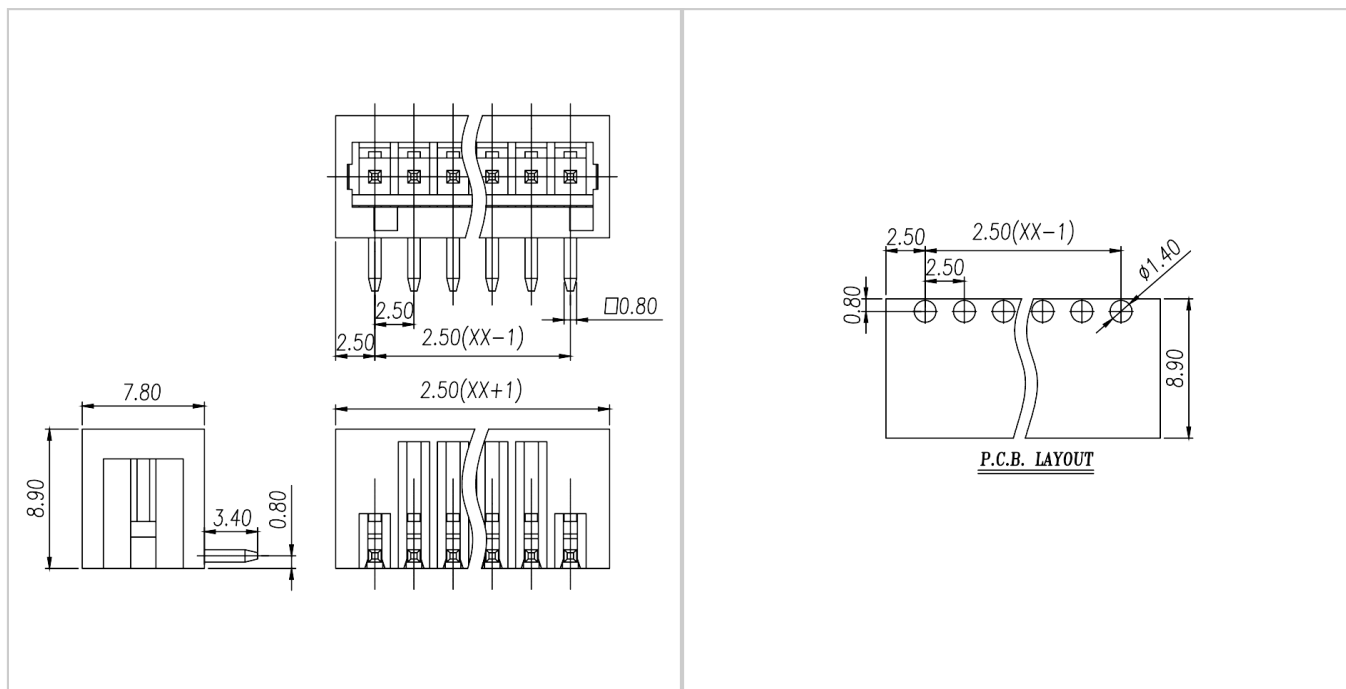

## 适配产品



WJ0101-01XX



WJ0101-02XX