

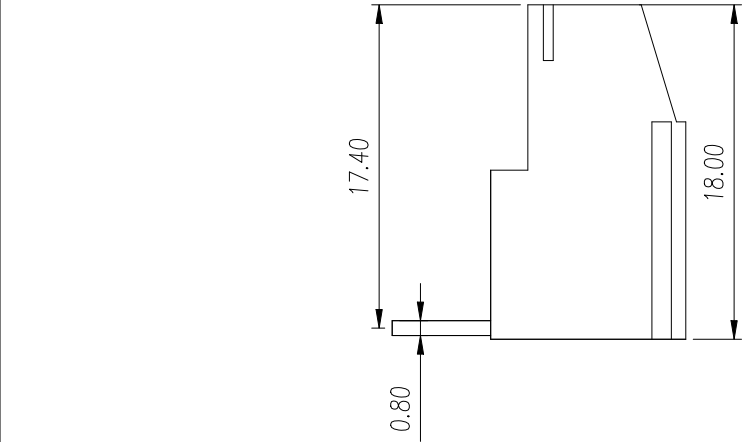


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

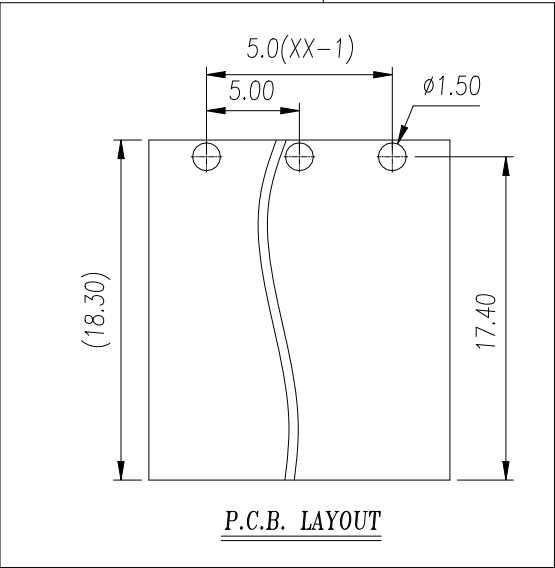

General Tolerances								— ▯ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

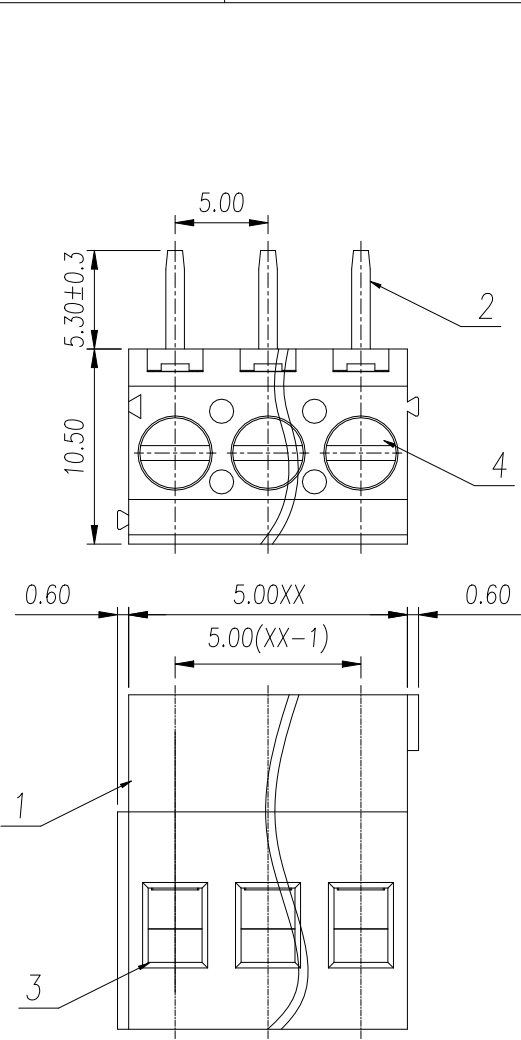

4	Screw	Steel	M3/Zn Plated	DES.	WangP	DATE	23.12.01	UNITS	mm	THIRD ANGLE PROJECTION			
3	Cage	Copper Alloy	M3/Ni Plated	CHK.	YangHJ	DATE	23.12.01	SIZE	A4	TYPE: CUSTOMER DRAWING		SHEET 1 of 1	
2	Header Pin	Copper Alloy	Sn Plated	APP.	JASON	DATE	23.12.01	SCALE	2.5:1	DRAWING TYPE: SP-03		REV	V0
1	Housing	PA66	UL94V-0	 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.:			
ITEM	NAME OF PART	MATERIAL	NOTES							WJ129R-5.0-XXP-1Y-00A			

REVISION RECORD											
REV.		ESCRIPTION				ECN No.		APPROVED		DATE	
V0		新发行						WangP		23.12.01	
		UL/CUL 技术参数 UL/CUL Technical Data									
		等 级 Use Group				B		C		D	
		额定电压 Rated Voltage [V]				300		-		300	
		额定电流 Rated Current [A]				20		-		10	
		接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]				26-12					
		耐电压 Withstanding Voltage				1600V/1Min					
		IEC 技术参数 IEC Technical Data									
		过电压类别 Overvoltage Category				III		III		II	
		污染等级 Contamination Class				3		2		2	
		额定电压 Rated Voltage [V]				250		400		630	
		额定电流 Rated Current [A]				24		24		24	
		额定冲击电压 Impulse withstand voltage [KV]				4.0		4.0		4.0	
		导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]				0.5-2.5					
		一般参数 Other Data									
		间距 Pitch /极数 Poles [mm]/ [P]				5.0 / 02~24					
		剥线长度 Stripping Length [mm]				6~7					
		螺丝 Screw/扭矩 Torque(Max) [N.m]				M3/0.5					
		工作温度 Operating temperature [°C]				-40~105					
		焊锡温度 Soldering temperature				260°C/5S					