

1



2

3


4

5

6

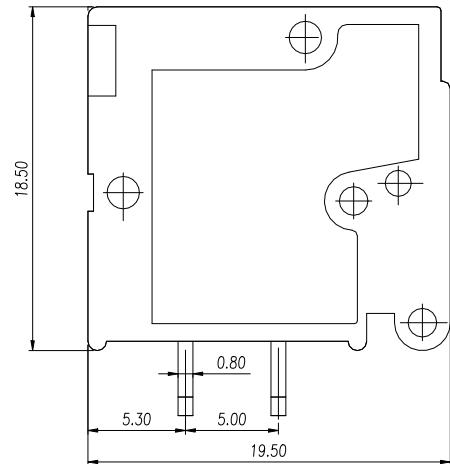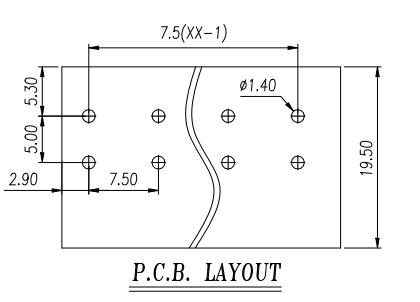

General Tolerances										—	□	±
variable range	to	over 6	over 10	over 30	over 60	over 100	over 160	to	to 10	over 10	over 100	to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

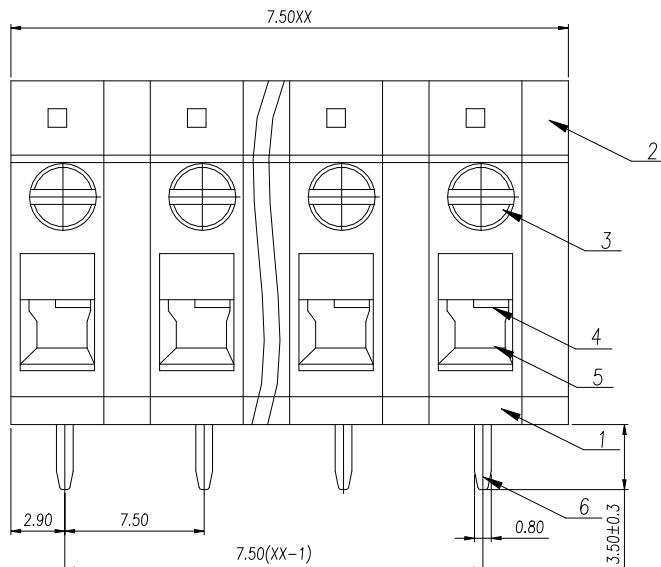

ITEM	NAME OF PART	MATERIAL	NOTES
6	Header pin	Copper Alloy	Sn Plated
5	Cage	Steel	M2.5/Zn Plated
4	Clamp block	Steel	Zn Plated
3	Screw	Steel	M2.5/Zn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

REVISION RECORD				
REV.	DESCRIPTION		ECN No.	APPROVED
V0	新发行		WangP	24.01.08

UL/CUL	技术参数			
UL/CUL	Technical Data			
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围	Wire Range	26-12		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1600V/1Min		
IEC 技术参数				IEC60947-7-4
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	450	630	1000
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	6.0	6.0	6.0
导线截面积	Conductor cross section	0.5-2.5		
硬质/柔性导线	Solid/ flexible [mm ²]			
一般参数	Other Data			
间距	Pitch /极数 Poles [mm] / [P]	7.5 / 01~30		
剥线长度	Stripping Length [mm]	12~13		
螺丝	Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		
工作温度	Operating temperature [°C]	-40~105		
焊锡温度	Soldering temperature	260°C/5S		

DES.	WangP	DATE	24.01.08	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	YangHJ	DATE	24.01.08	SIZE	A4	TYPE: CUSTOMER DRAWING	
APP.	JASON	DATE	24.01.08	SCALE	2.5:1	DRAWING TYPE: SP-03	REV V0
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ105R-7.5-XXP-1Y-00A	

1

2

3

4

5

FOR-0371 Rev.1.0